
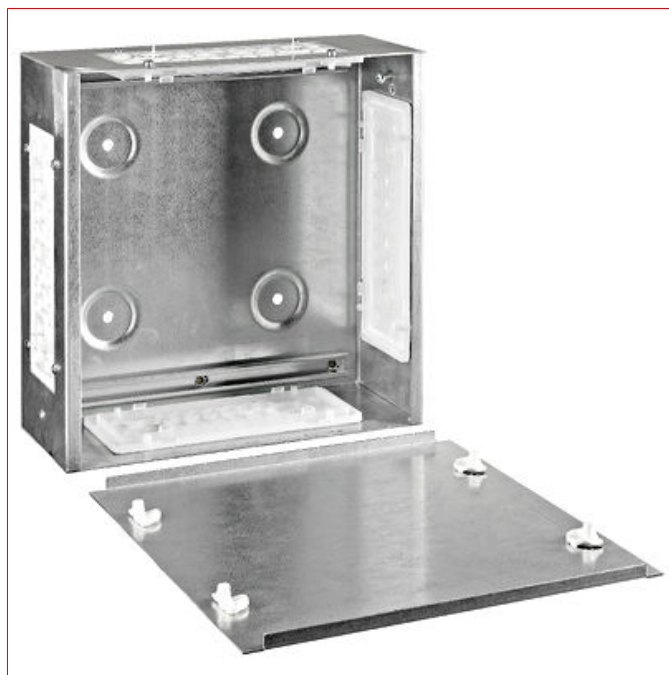


Dane techniczne dla produktu: BK060001--

Obudowa IP30, W=300 S=300 G=120, blacha stalowa

każdy przepust kablowy z wejściami: 14x13mm, 8x17mm i 2x30mm

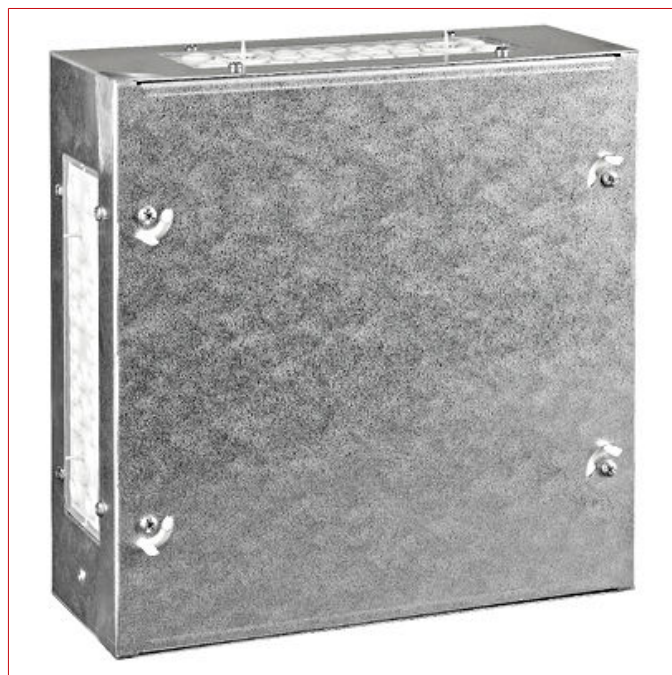

SCHRACK-Info

- Marshalling Distributors in three different sizes
- Large space for connecting cables and wires
- Push-through entry possible from four sides (top, bottom, left and right)
- Cover front opening with four twist locks
- Each distributor with two earthing possibilities
- Material:
 - BK060001: 1 mm galvanised sheet steel
 - BK060002: 1.5mm galvanised sheet steel
 - BK060003: 1.5mm galvanised sheet steel
- Wall-mounting:
 - 4x Holes with Ø8.5mm each in the rear panel
 - Mounting material is not included
- Gland plates:
 - Standard size: W=195 D=63mm
 - Quantity:
 - BK060001: 4 pieces,
 - BK060002: 6 pieces,
 - BK060003: 8 pieces


- Cable entries:
 - 14x13mm,
 - 8x17mm,
 - 2x30mm
- Protection class: I
- Degree of protection: IP30
- Impact resistance: IK07



Dane techniczne

Szerokość (mm)	300,00
Wysokość (mm)	300,00
Głębokość (mm)	120,00
Waga (kg)	3,36
EAN	9004840852578
Straty mocy (W)	-46,00
Min. temperatura otoczenia (°C)	-5
Maks. temperatura otoczenia (°C)	40

Technical Details - Marshalling Distributors

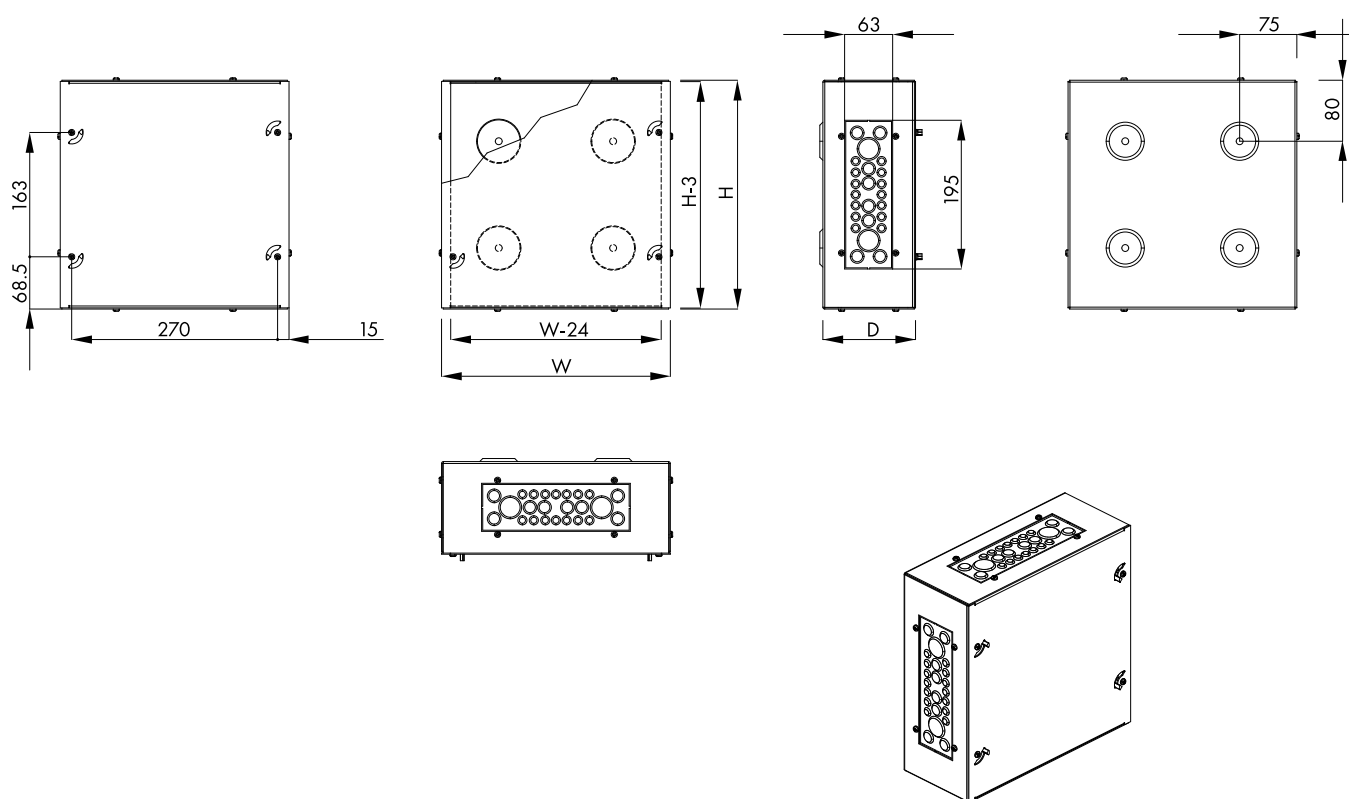

[mm]

Dane techniczne: Obudowa IP30, W=300 S=300 G=120, blacha stalowa

Artikelnummer	H (mm)	B (mm)	T (mm)
BK060001	300	300	120
BK060002	600	300	120
BK060003	600	600	120

Lista produktów

OPIS	Nr katalogowy
Obudowa IP30, W=300 S=300 G=120, blacha stalowa każdy przepust kablowy z wejściami: 14x13mm, 8x17mm i 2x30mm	BK060001
Dodatkowe akcesoria	
Płyta gwintowana M4 ocynkowana, prostokątna, 100szt. H=18,5 W=10 D=4mm	IG714314
Nakrętka przestawna M5, 100 szt.	IL900230-F
Płyta gwintowana M5 ocynkowana, prostokątna, 100szt. H=18,5 W=10 D=4mm	IG714315