



Dane techniczne dla produktu: HLP23TT01F

# Patchcord Duplex ST/UPC - ST/UPC, 50/125µm OM3, LSOH

aqua, 1.0m

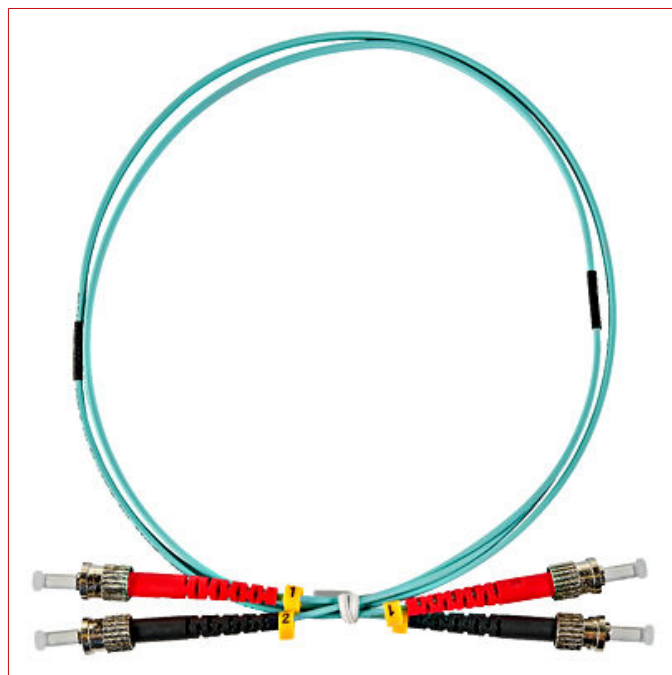

## SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

### FEATURES

- ST/UPC - ST/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

### APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



## Dane techniczne

|                                          |                               |
|------------------------------------------|-------------------------------|
| Norma                                    | IEC 61300-3-4 / IEC 61300-3-6 |
| Połączenie zgodnie z normą               | IEC 61754                     |
| kombinacja połączeń światłowodowych      | ST/ST                         |
| Długość kabla krosowego (mb)             | 1                             |
| Typ włókna                               | 50/125µm OM3 wielomodowe      |
| Płaszcz kabla                            | LS0H                          |
| Kolor                                    | turkusowy                     |
| Typowa tłumienność wtrąceniowa (IL) (dB) | ≤0,25                         |
| Typowa tłumienność odbiciowa (RL) (dB)   | ≥30                           |
| Min. temperatura otoczenia (°C)          | -20                           |
| Maks. temperatura otoczenia (°C)         | 60                            |
| Szerokość (mm)                           | 180,00                        |
| Wysokość (mm)                            | 250,00                        |
| Waga (kg)                                | 0,08                          |

## Rysunek wymiarowy: Patchcord Duplex ST/UPC - ST/UPC, 50/125µm OM3, LS0H

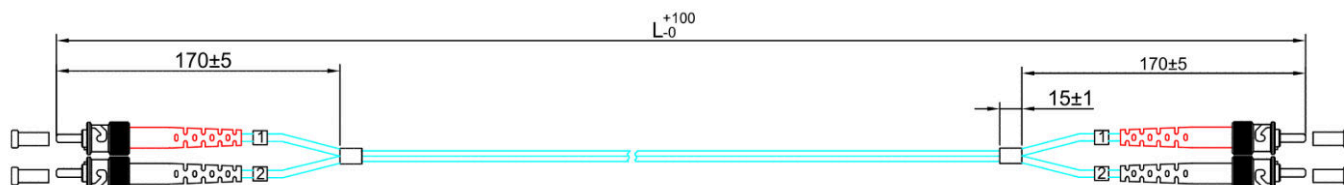

Patchcord Duplex ST/UPC - ST/UPC, 50/125µm OM3, LSOH  
aqua, 1.0m

HLP23TT01F