


Dane techniczne dla produktu: HLP24CC01F

Światł. kabel kros. DPLX SC/SC 50/ 125 OM4 LSOH-3 fiolet. 1m

LSOH, heather violet

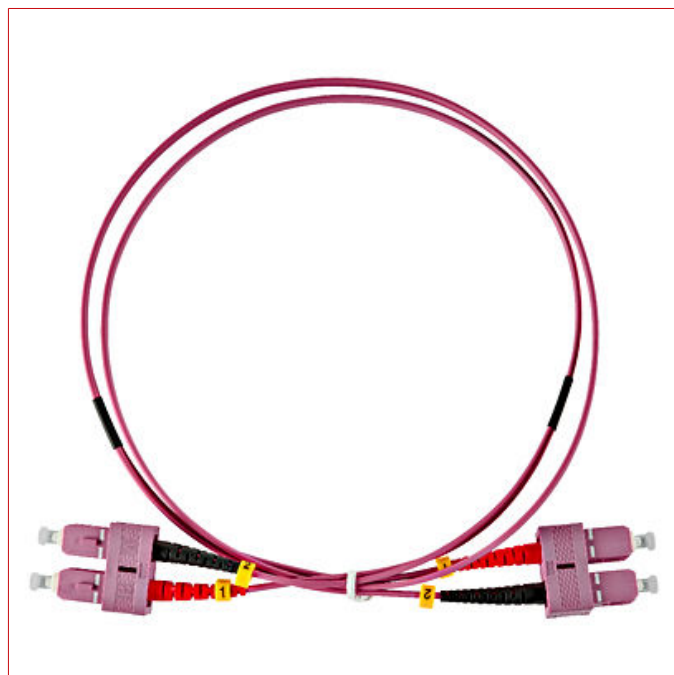

SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- SC/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Dane techniczne

Norma	IEC 61300-3-4 / IEC 61300-3-6
Połączenie zgodnie z normą	IEC 61754
kombinacja połączeń światłowodowych	SC/SC
Długość kabla krosowego (mb)	1,0
Typ włókna	50/125µm OM4 wielomodowe
Płaszcz kabla	LS0H
Kolor	fiolet wrzosowy
Typowa tłumienność wtrąceniowa (IL) (dB)	≤0,25
Typowa tłumienność odbiciowa (RL) (dB)	≥30
Min. temperatura otoczenia (°C)	-20
Maks. temperatura otoczenia (°C)	60
Szerokość (mm)	200,00
Wysokość (mm)	300,00
Waga (kg)	0,05

Rysunek wymiarowy: Światł. kabel kros. DPLX SC/SC 50/125 OM4 LS0H-3 fiolet. 1m

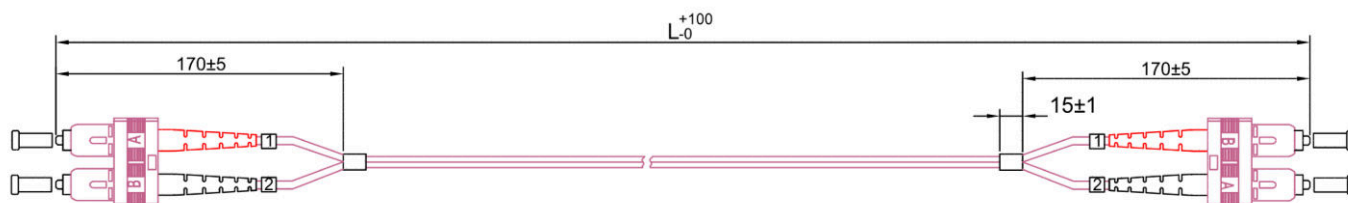

OPIS

Nr katalogowy

Światł. kabel kros. DPLX SC/SC 50/125 OM4 LS0H-3 fiolet. 1 m
LS0H, heather violet

HLP24CC01F