


Dane techniczne dla produktu: IL413545-A

Zählerverteiler Einsatz 5-45E, 5 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

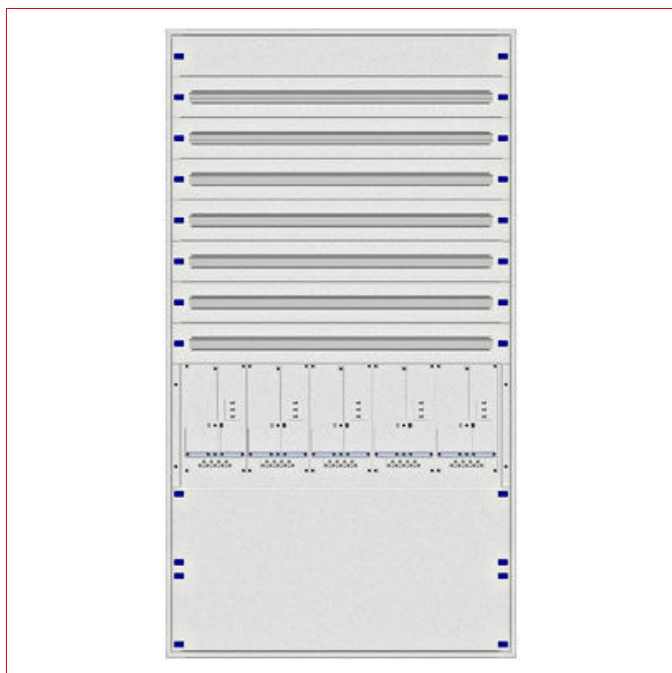

Dane techniczne

Szerokość (mm)	1.140,00
Wysokość (mm)	2.070,00
Głębokość (mm)	150,00
EAN	9004840966961
Kategoria produktowa	wkłady licznikowe
Region	Tyrol
Elementy konstrukcyjne	płyty czołowe metalowe
Kolor	RAL 7035
Szerokość licznika	5
Ilość jednostek wysokości (U)	45
Ilość rzędów liczników	1
Ilość miejsc licznikowych	5
dalszych rzędów	7
Opis podstawowy	wkład modułowy

Lista produktów

OPIS	Waga miedzi (kg/km)	Nr katalogowy
Zählerverteiler Einsatz 5-45E, 5 Zählerplätze, Tirol		IL413545-A
Frontblende Stahlblech, komplett		
Dodatkowe akcesoria		
Uziemienie 300mm/Yf 6mm ² , podkładka i śruby mocujące		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824