

Dane techniczne dla produktu: NCCB2461--

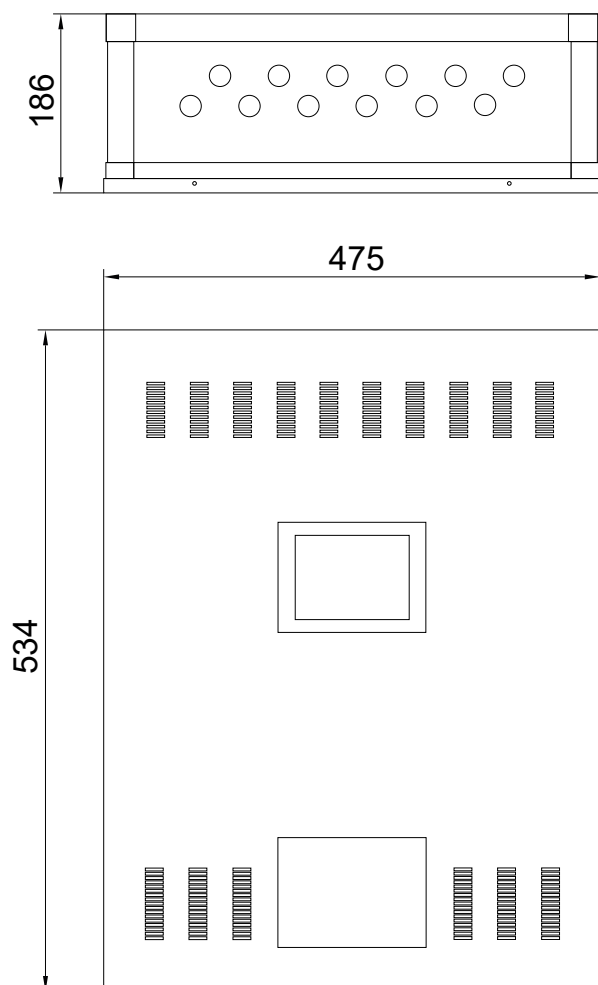
## Low Power Supply 24V DC SECURO 24 CON cab. M 6/20 wo. batt.

6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with circuit monitoring, cabinet M (for 2 x 45Ah): H534 x W475 x D186mm, without batteries



### Dane techniczne

|                |        |
|----------------|--------|
| Szerokość (mm) | 475,00 |
| Wysokość (mm)  | 534,00 |
| Głębokość (mm) | 186,00 |
| Waga (kg)      | 14,00  |

**Rysunek wymiarowy: Low Power Supply 24V DC SECURO 24 CON cab. M  
6/20 wo. batt.**

## Lista produktów

| OPIS                                                                                                                                                                                                                                                                                                                                                             | Nr katalogowy |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Low Power Supply 24V DC SECURO 24 CON cab. M 6/20 wo. batt.<br>6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode:<br>1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with circuit monitoring, cabinet M (for 2 x 45Ah): H534 x W475 x<br>D186mm, without batteries | NCCB2461      |
| <b>Dodatkowe akcesoria</b>                                                                                                                                                                                                                                                                                                                                       |               |
|                                                                                                                                                                                                                                                                                                                                                                  | NLBA045       |
| Rescue sign luminaire SECURO 24 CON R1 1W LED 24V DC<br>White, universal mounting, viewing distance: 24m                                                                                                                                                                                                                                                         | NCR1MUW04     |
| Rescue sign luminaire SECURO 24 R1 1W LED 24V DC<br>White, universal mounting, viewing distance: 30m                                                                                                                                                                                                                                                             | NCR1XUW04     |
| Rescue sign luminaire SECURO 24 CON R3 1W LED 24V DC<br>White, ceiling surface mounting, viewing distance: 46m                                                                                                                                                                                                                                                   | NCR3XDW04     |
| Rescue sign luminaire SECURO 24 CON C1 1W LED 24V DC<br>White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC1H), including adhesive pictogram set,<br>viewing distance: 17m                                                                                                                                                    | NCC1SUW04     |
| Rescue sign luminaire SECURO 24 CON C2 1W LED 24V DC<br>White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC2H), including adhesive pictogram set,<br>distance: 30m                                                                                                                                                            | NCC2XWW04     |
| Security luminaire SECURO 24 CON S2 3W ERT-LED 24V DC<br>White, ceiling surface mounting, incl. exchangeable lenses for illuminating escape routes or round areas, 314lm                                                                                                                                                                                         | NCS2LDW14     |
| Security luminaire SECURO 24 CON S3 4W ERT-LED 24V DC<br>White, ceiling recessed mounting, incl. exchangeable lenses for illuminating escape routes or round areas, 377lm                                                                                                                                                                                        | NCS3LEW14     |
| Security luminaire SECURO 24 CON C1 6W HP-LED 24V DC<br>White, ceiling surface mounting, 590lm                                                                                                                                                                                                                                                                   | NCC1CDW24     |
| Security luminaire SECURO 24 CON C2 6W HP-LED 24V DC<br>White, ceiling surface mounting, 600lm                                                                                                                                                                                                                                                                   | NCC2CDW24     |