

Dane techniczne dla produktu: NCCB2461E-

## Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 wo. batt.


6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet M (for 2 x 45Ah): H534 x W475 x D186mm, without batteries




### Dane techniczne

|                |        |
|----------------|--------|
| Szerokość (mm) | 475,00 |
| Wysokość (mm)  | 534,00 |
| Głębokość (mm) | 186,00 |
| Waga (kg)      | 14,00  |

## Rysunek wymiarowy: Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 wo. batt.

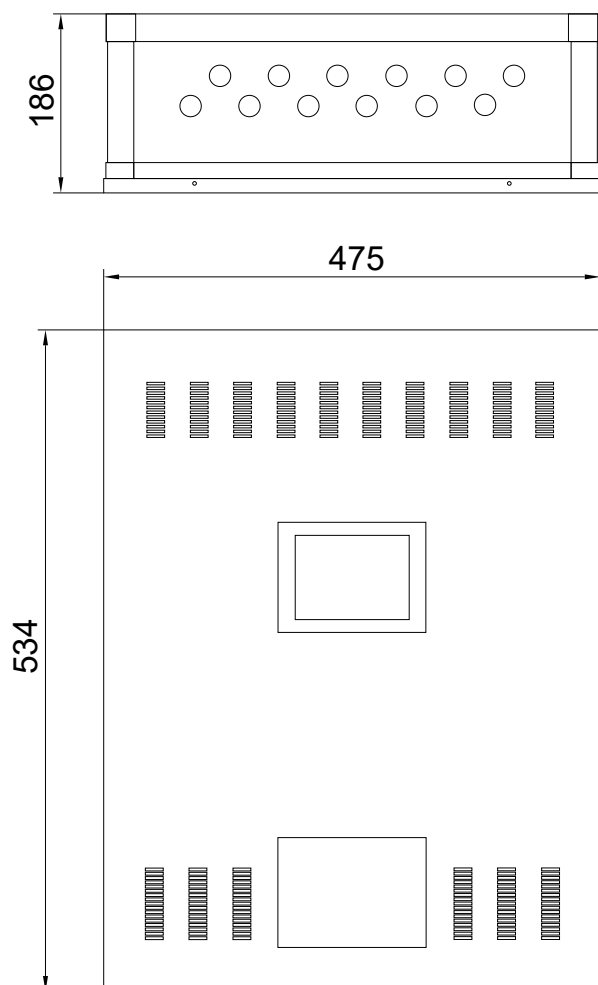

## Connections

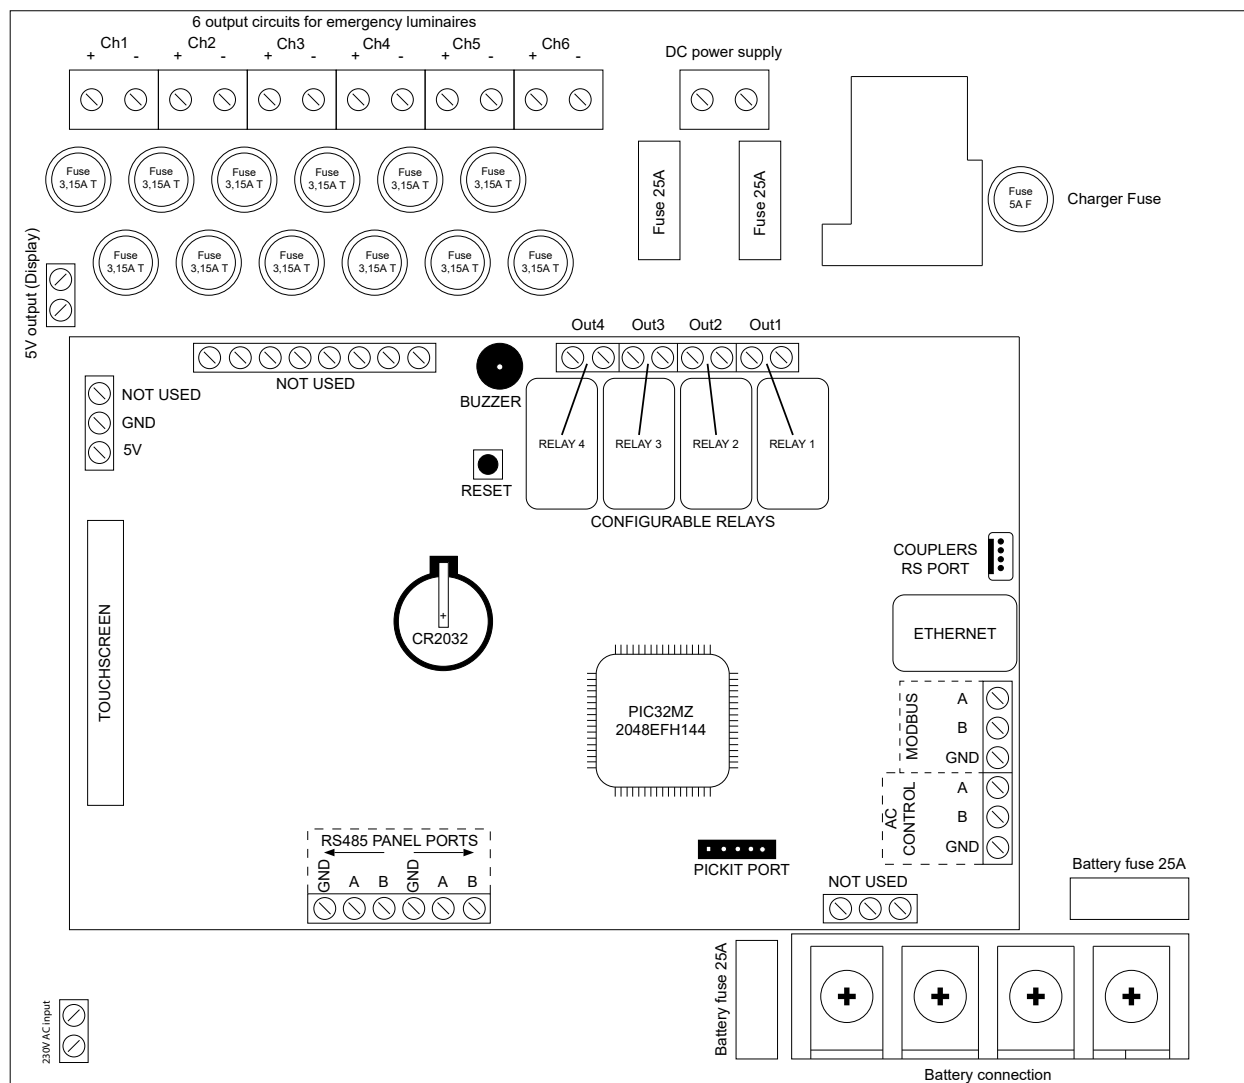

## Lista produktów

| OPIS                                                                                                                                                                                                                                                                                                                                                                      | Nr katalogowy |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 wo. batt.<br>6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode:<br>1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet M (for 2 x 45Ah): H534 x<br>W475 x D186mm, without batteries | NCCB2461E     |
| <b>Dodatkowe akcesoria</b>                                                                                                                                                                                                                                                                                                                                                |               |
| SECURO AC230 bus module and 1-phase mains monitor<br>Including a potential-free switching input, for controlling up to three lighting groups, connection via RS 485 bus, compatible with<br>SECURO 24 PRO, AC Control                                                                                                                                                     | NCCCLAC230    |
|                                                                                                                                                                                                                                                                                                                                                                           | NLBA045       |
| Rescue sign luminaire SECURO 24 PRO R1 1W LED 24V DC<br>White, universal mounting, with single lamp supervision - centrally switchable, viewing distance: 24m                                                                                                                                                                                                             | NCR1MUW04C    |
| Rescue sign luminaire SECURO 24 PRO R1 1W LED 24V DC<br>White, universal mounting, with single lamp supervision - centrally switchable, viewing distance: 30m                                                                                                                                                                                                             | NCR1XUW04C    |
| Rescue sign luminaire SECURO 24 PRO R3 1W LED 24V DC<br>White, ceiling surface mounting, with single lamp supervision - centrally switchable, viewing distance: 46m                                                                                                                                                                                                       | NCR3XDW04C    |
| Rescue sign luminaire SECURO 24 PRO C1 1W LED 24V DC<br>White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC1H), with single lamp supervision -<br>centrally switchable, including adhesive pictogram set, viewing distance: 17m                                                                                                        | NCC1SUW04C    |
| Rescue sign luminaire SECURO 24 PRO C2 1W LED 24V DC<br>White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC2H), with single lamp supervision -<br>centrally switchable, including adhesive pictogram set viewing, distance: 30m                                                                                                        | NCC2XWW04C    |
| Security luminaire SECURO 24 PRO S2 3W ERT-LED 24V DC<br>White, ceiling surface mounting, with single lamp supervision - centrally switchable, incl. exchangeable lenses for illuminating<br>escape routes or round areas, 314lm                                                                                                                                          | NCS2LDW14C    |
| Security luminaire SECURO 24 PRO S3 4W ERT-LED 24V DC<br>White, ceiling recessed mounting, with single lamp supervision - centrally switchable, incl. exchangeable lenses for illuminating<br>escape routes or round areas, 377lm                                                                                                                                         | NCS3LEW14C    |
| Security luminaire SECURO 24 PRO C1 6W HP-LED 24V DC<br>White, ceiling surface mounting, with single lamp supervision - centrally switchable, 590lm                                                                                                                                                                                                                       | NCC1CDW24C    |
| Security luminaire SECURO 24 PRO C2 6W HP-LED 24V DC<br>White, ceiling surface mounting, with single lamp supervision - centrally switchable, 600lm                                                                                                                                                                                                                       | NCC2CDW24C    |