

Dane techniczne dla produktu: NLILD1529C

Emergency luminaire IL 1x3W ERTLED CC24 24V white

Ceiling surface mounting, emergency luminaire with changeable lenses for illuminating escape routes or round surfaces, with supervision - centrally switchable, 360lm




Dane techniczne

Wysokość (mm)	36,00
Średnica nominalna (mm)	99,00
Waga (kg)	0,35
Rodzaj oprawy oświetleniowej	awaryjna
EB-ZB	Zasilacze centralne do opraw
Funkcja	24V Core24 z nadzorem - przełączane centralnie
Wersja	oprawy plastikowe
Design / Seria	IL
Bezhlogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	RAL 9003
Źródło światła	ERT-LED (3W)
Strumień świetlny	360
Zakres napięcia (V)	24V AC

Dane techniczne - kontynuacja


Power maintained mode (W)	2,80
Power non-maintained mode (W)	0,40
Power max. (W)	2,80
Stopień szczelności	IP40
Odporność na uderzenia	≥ IK03
Montaż	wpuszczany (opcjonalnie) sufitowy natynkowy
Min. temperatura otoczenia (°C)	-20
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA4
Producent	Schrack

Abmessungen Einbaurahmen NLILDE (mm)

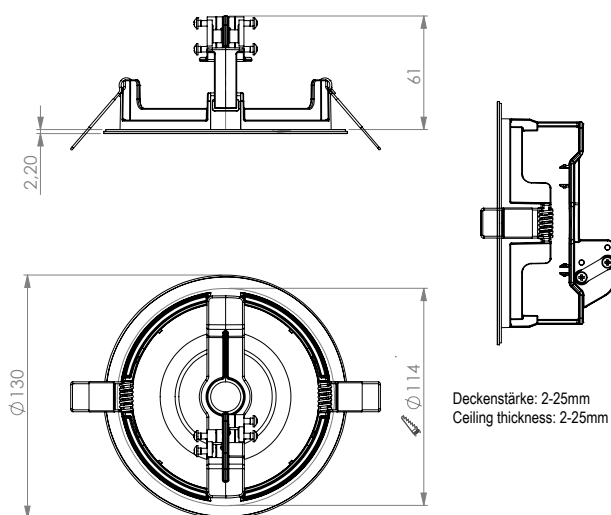


Abmessungen (mm)

NLILD...

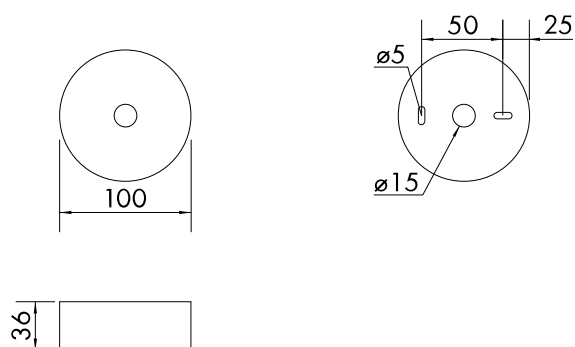


Abmessungen Zubehör NLILIP65 (mm)

NLILIP65...

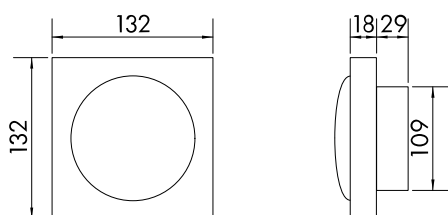


Abmessungen Zubehör Metall-Überschubgehäuse NLEA.. (mm)

NLEAQ...

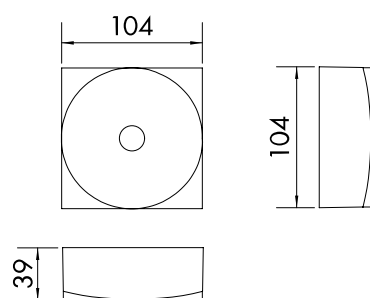

NLEAR...

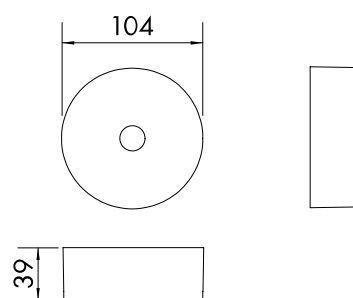

Abstandstabelle mit Korridorlinse (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	2,87	7,78	12,06	16,21	7,12
2,50	2,99	8,08	13,42	18,77	8,26
3,00	3,03	8,31	14,72	21,08	9,29
3,50	3,01	8,53	16,01	23,34	10,15
4,00	2,99	8,65	17,06	25,46	10,91
5,00	2,93	8,60	18,74	29,02	12,04
6,00	2,29	8,57	14,93	27,82	3,58

Abstandstabelle Runde-Linse (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8

					
2,00	4,10	8,72	8,72	8,72	4,10
2,50	4,93	10,54	10,54	10,54	4,93
3,00	5,70	12,22	12,22	12,22	5,70
3,50	6,31	13,87	13,87	13,87	6,31
4,00	6,71	15,43	15,43	15,43	6,71
5,00	0,95	13,16	13,16	13,16	0,95

Abstandstabelle Spot-Linse (NLLSYSS4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8

					
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,21	4,96	4,96	4,96	2,21
3,00	2,60	5,87	5,87	5,87	2,60
3,50	2,86	6,57	6,57	6,57	2,86
4,00	3,16	7,17	7,17	7,17	3,16
5,00	3,64	8,23	8,23	8,23	3,64
6,00	4,05	9,36	9,36	9,36	4,05
7,00	4,43	10,30	10,30	10,30	4,43
8,00	4,71	11,08	11,08	11,08	4,71
9,00	4,90	11,93	11,93	11,93	4,90
10,00	5,00	12,64	12,64	12,64	5,00
12,00	4,95	13,67	13,67	13,67	4,95
14,00	4,58	14,17	14,17	14,17	4,58
16,00	3,83	14,20	14,20	14,20	3,83

Abstandstabelle Hohe-Flur-Linse (NLLSYSH4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8

					
2,00	1,68	4,18	7,30	10,44	4,57
2,50	2,10	5,23	9,07	12,74	5,50
3,00	2,23	5,70	10,00	14,31	6,07
3,50	1,91	6,05	10,83	15,72	6,55
4,00	1,77	6,30	11,50	16,99	6,97
5,00	1,80	5,52	12,33	18,93	7,63
6,00	2,00	5,19	12,71	20,54	8,06
7,00	2,12	5,06	13,01	21,83	8,25
8,00	2,16	5,49	13,29	22,90	8,28
9,00	2,23	5,81	13,37	23,42	8,20
10,00	2,26	6,02	13,34	23,75	8,00
12,00	2,11	6,22	13,02	23,76	7,16
14,00	1,75	6,39	12,13	23,12	5,63
16,00	0,44	6,20	10,25	21,78	0,00

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire IL 1x3W ERTLED CC24 24V white Ceiling surface mounting, emergency luminaire with changeable lenses for illuminating escape routes or round surfaces, with supervision - centrally switchable, 360lm	NLILD1529C
Dodatkowe akcesoria	
4 LED changeable lens: Round-illuminating circular surfaces Suitable for emergency luminaires with changeable lens system	NLLSYSR4
4 LED changeable lenses: Corridor-illuminating escape routes Suitable for emergency luminaires with exchangeable lens system	NLLSYSF4
4 LED changeable lens: Spot area illumination for high rooms Suitable for emergency luminaires with changeable lens system	NLLSYSS4
4 LED changeable lens: Beam-asymmetric illumination For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLLSYSB4
4 LED changeable lenses: corridor illuminat. high rooms >4m Suitable for emergency luminaires with changeable lens system	NLLSYSH4
Recessed frame white for emergency luminaires NLILD.. Required ceiling cut out: diameter 114 mm	NLILDE
Kwadratowa obudowa B1 do opraw awaryjnych NLILD.	NLILB1
Kwadratowa obudowa B2 do opraw awaryjnych NLILD.	NLILB2
Plug over housing white round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Plug over housing anthracite round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Plug over housing white square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Plug over housing anthracite square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Spacer plate white for NLILD.. for cable entry at the side	NLILDAPA2
Ball Protection basket for IL, KT, DAQ, DAR, S2	NLBALL3
Surface mounted housing white IP65 for emerg. Lumin. NLILD Polycarbonate, with side cable entries	NLILIP65K
IP65 housing for IL ceiling mounted luminaires, white, IK10 Suitable for surface-mounted emergency ceiling lights NLILD..., including spacer plate, vandal-proof with shock resistance test according to IK10, ball impact resistant according to DIN 18032	NLIIK10W