


Dane techniczne dla produktu: NLILDR023S

Oprawa awaryjna IL 1x3W ERT-LED 3h 230VAC do stref otwartych

autotest, natynkowa

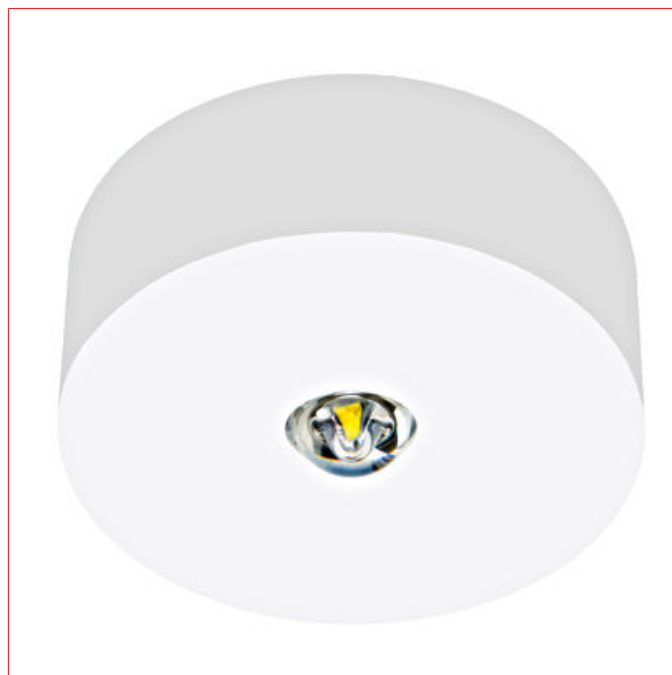


Dane techniczne

Wysokość (mm)	36,00
Średnica nominalna (mm)	99,00
Waga (kg)	0,25
Rodzaj oprawy oświetleniowej	Oprawa awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	autotest
Wersja	oprawy plastikowe
Design / Seria	IL
Bezhalogenowy	Housing made of halogen-free plastic
Kolor	Biały
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (3W)
Strumień świetlny	240
Zakres napięcia (V)	230V AC 50Hz ±20%


Dane techniczne - kontynuacja

Akumulatory (V/Ah)	4,8/2,0 NiMH
Stopień szczelności	IP40
Montaż	Sufitowy natynkowy
AA Class E 8101	AA4


Dimensions NLILD... (mm)

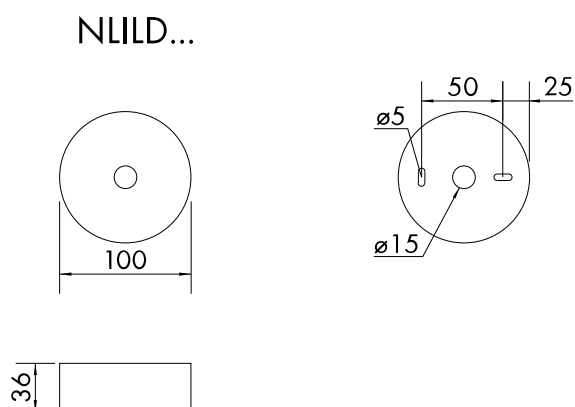


Dimensions accessoires NLILIP65 (mm)

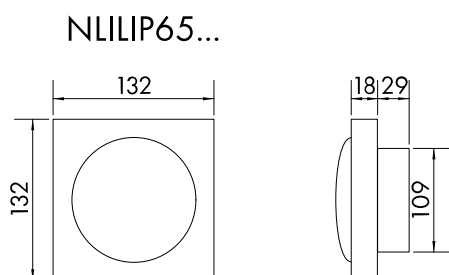

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

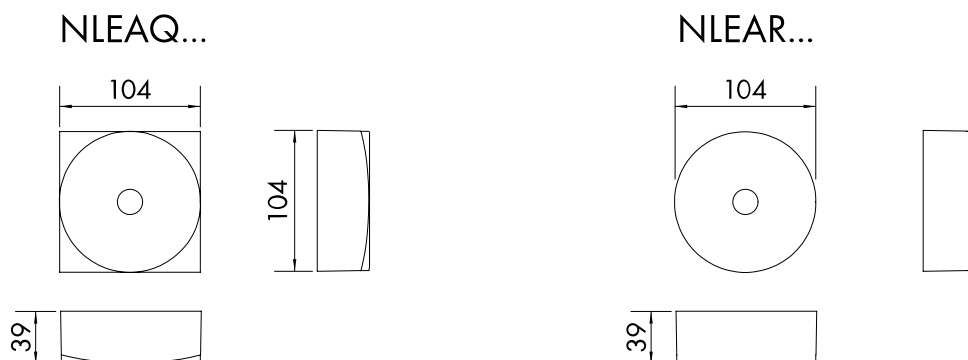

Dimensions recessed frame NLILDE (mm)

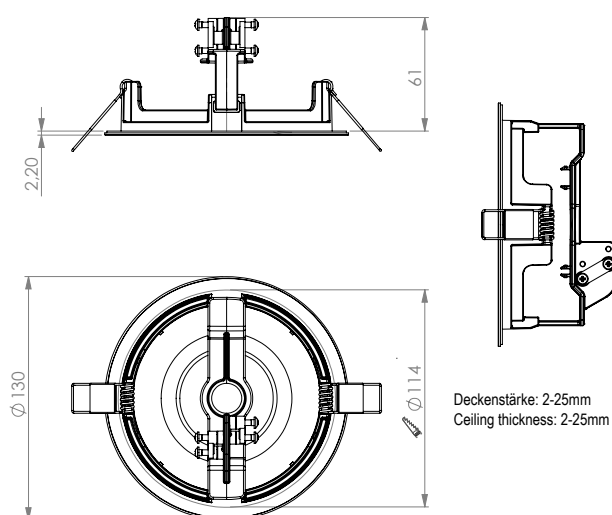

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	4.29	10.07	10.07	10.07	4.29
2,50	4.16	11.44	11.44	11.44	4.16
3,00	1.95	12.22	12.22	12.22	1.95
3,50	0,00	10.04	10.04	10.04	0,00
4,00	0,00	8,70	8,70	8,70	0,00

Lista produktów

OPIS	Nr katalogowy
Oprawa awaryjna IL 1x3W ERT-LED 3h 230VAC do stref otwartych autotest, natynkowa	NLILDR023S
Dodatkowe akcesoria	
Kwadratowa obudowa B1 do opraw awaryjnych NLILD.	NLILB1
Kwadratowa obudowa B2 do opraw awaryjnych NLILD.	NLILB2
Plug over housing white round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Plug over housing anthracite round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Plug over housing white square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Plug over housing anthracite square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Uchwyt kablowy boczny do serii NLILD..	NLILDAPA
Ball Protection gascet for IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
Obudowa IP65 do opraw sufitowych IL, biała Suitable for ceiling mounted emergency luminaires NLILD., zinc die-cast, IK10, including spacer plate	NLILIP65W
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820