

Dane techniczne dla produktu: NLILDS023W

Oprawa awaryjna IL1x3W ERT-LED 3h 230VAC punktowa


beprzewodowa, natynkowa




Dane techniczne

Wysokość (mm)	36,00
Średnica nominalna (mm)	99,00
Waga (kg)	0,25
Rodzaj oprawy oświetleniowej	awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	sterowanie bezprzewodowe
Wersja	oprawy plastikowe
Design / Seria	IL
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	biały
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (3W)
Strumień świetlny	240
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	4,8/2,0 NiMh
Stopień szczelności	IP40
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-5
Maks. temperatura otoczenia (°C)	30
AA Class E 8101	AA4


Dimensions NLILD... (mm)

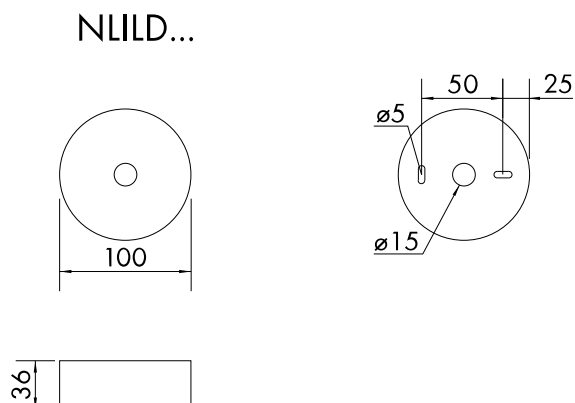

Dimensions accessoires NLILIP65 (mm)

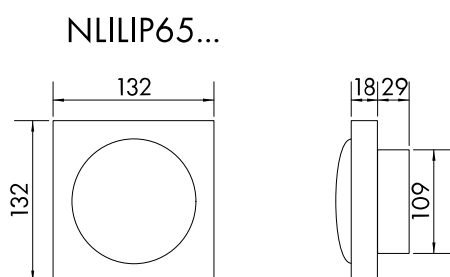

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

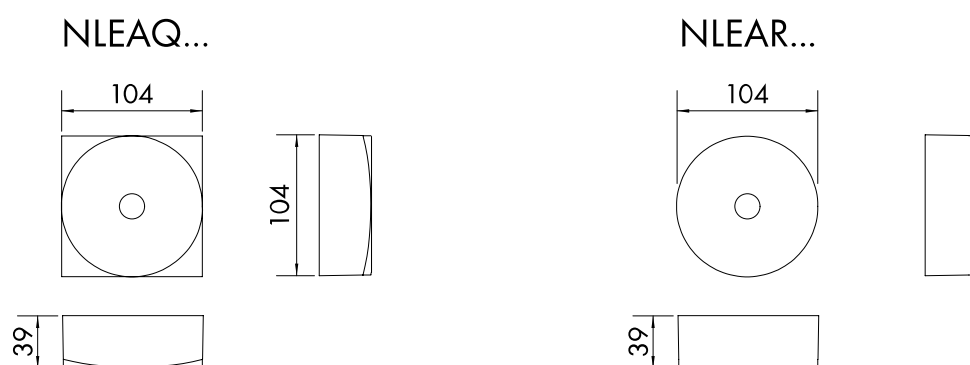

Dimensions recessed frame NLILDE (mm)



Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	2,22	5,34	5,38	5,41	2,30
2,50	2,50	6,28	6,33	6,38	2,59
3,00	2,80	6,81	6,87	6,92	2,80
3,50	2,94	7,28	7,35	7,42	3,04
4,00	3,13	7,72	7,79	7,86	3,13
5,00	3,38	8,64	8,58	8,52	3,38
6,00	3,60	9,34	9,26	9,18	3,46
7,00	3,72	9,86	9,74	9,64	3,56
8,00	3,56	10,30	10,16	10,02	3,40
9,00	3,27	10,53	10,38	10,20	3,27
10,00	3,04	10,6	10,44	10,28	2,88
12,00	2,13	10,11	9,93	9,75	1,89

Lista produktów

OPIS	Nr katalogowy
Oprawa awaryjna IL1x3W ERT-LED 3h 230VAC punktowa bezprzewodowa, natynkowa	NLILDS023W
Dodatkowe akcesoria	
Kwadratowa obudowa B1 do opraw awaryjnych NLILD.	NLILB1
Kwadratowa obudowa B2 do opraw awaryjnych NLILD.	NLILB2
Plug over housing white round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Plug over housing anthracite round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Plug over housing white square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Plug over housing anthracite square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Spacer plate white for NLILD.. for cable entry at the side	NLILDAPA2
Ball Protection basket for IL, KT, DAQ, DAR, S2	NLBALL3
Surface mounted housing white IP65 for emerg. Lumin. NLILD Polycarbonate, with side cable entries	NLILIP65K
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820
IP65 housing for IL ceiling mounted luminaires, anthracite Suitable for surface-mounted emergency ceiling lights NLILD..., including spacer plate, vandal-proof with shock resistance test according to IK10, ball impact resistant according to DIN 18032	NLILIK10A