

Dane techniczne dla produktu: NLKSCS403W

Emergency luminaire KS WirelessControl LED

3h 230V AC, black

Universal mounting, with LiFePO₄ battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm




Dane techniczne

Długość (mm)	250,00
Szerokość (mm)	34,00
Wysokość (mm)	174,00
Waga (kg)	0,60
Rodzaj oprawy oświetleniowej	kombinowana awaryjna i ewakuacyjna kierunkowa ewakuacyjna awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	sterowanie bezprzewodowe
Wersja	oprawy plastikowe oprawy awaryjne dwustronne
Design / Seria	KS
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego


Dane techniczne - kontynuacja

Kolor	RAL 9005 (czarny)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Widoczność (mb)	22
Czas podtrzymania (H)	3
Źródło światła	LED (2W)
Strumień świetlny	190
Zakres napięcia (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Akumulatory (V/Ah)	3,2/3,0 LiFePO4
Stopień szczelności	IP54
Odporność na uderzenia	$\geq$ IK03
Montaż	naścienny wpuszczany (opcjonalnie) uniwersalny sufitowy natynkowy
Min. temperatura otoczenia (°C)	-5
Maks. temperatura otoczenia (°C)	40
AA klasa E 8101	AA4
Producent	Schrack

Rysunek wymiarowy: Emergency luminaire KS WirelessControl LED 3h 230V AC, black

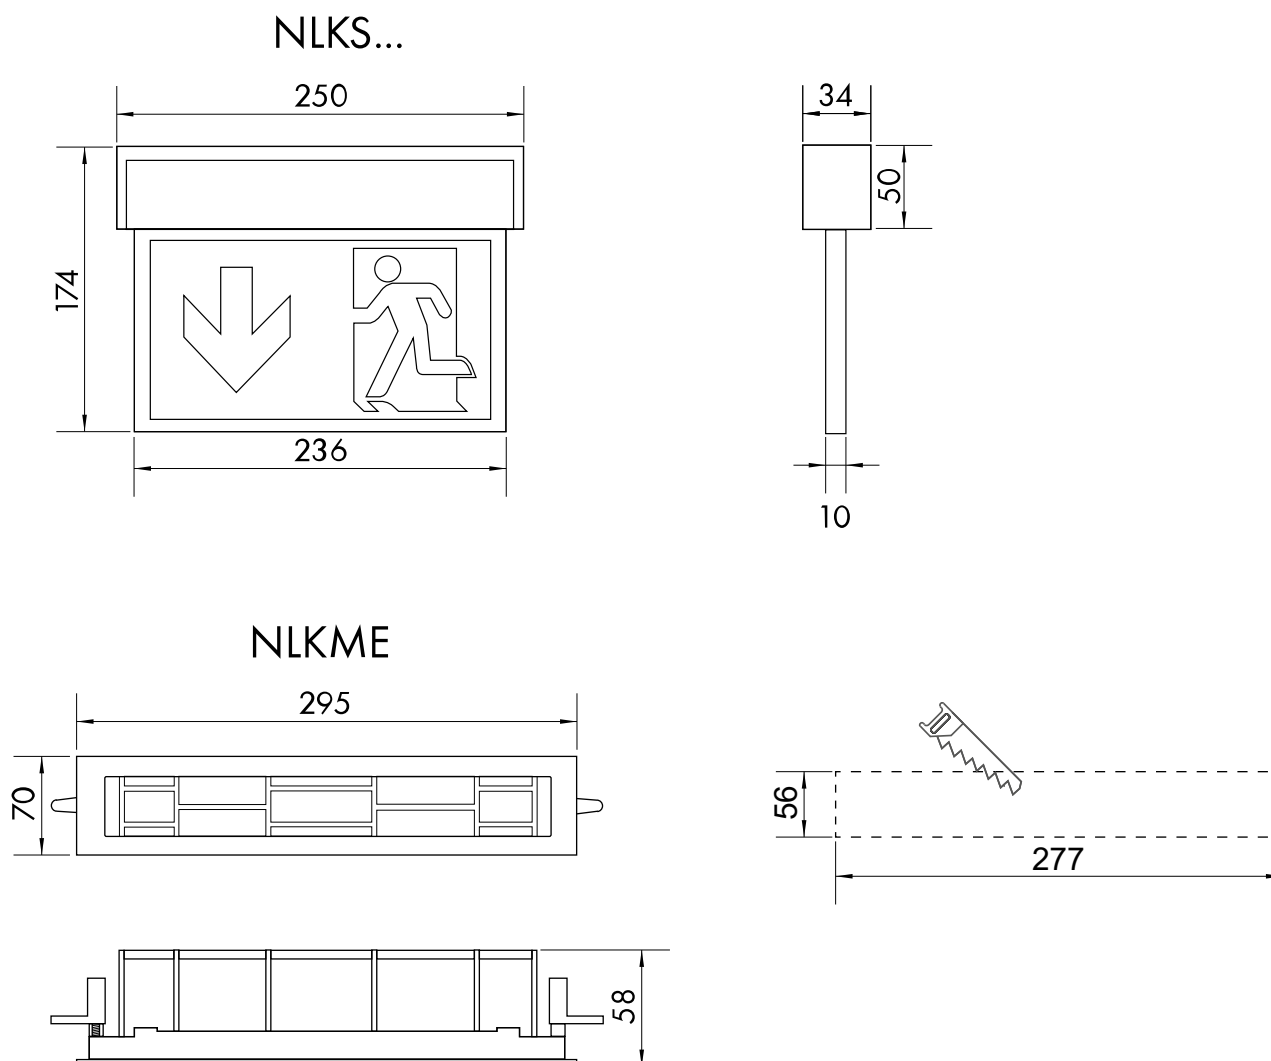

Rysunek wymiarowy: Emergency luminaire KS WirelessControl LED 3h 230V AC, black

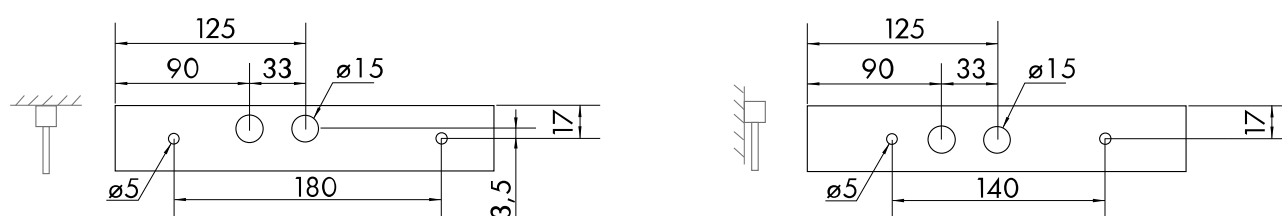

Dane techniczne: Emergency luminaire KS WirelessControl LED 3h 230V AC, black

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire KS WirelessControl LED 3h 230V AC, black	
Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm	NLKSCS403W
Dodatkowe akcesoria	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Piktogram podłączany lewy górny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Piktogram podłączany lewy dolny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Piktogram podłączany prawy górny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Piktogram podłączany prawy dolny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Design pair of pendants 500 mm white, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWMKMS
Zawiesie dla opraw KD,KS,LI,M,	NLBALL1
Zawiesie łańcuchowe LI-DESIGN	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4