

Dane techniczne dla produktu: NLKSCT03WL

Emergency luminaire KSC WirelessControl LED 3h 230V AC TT

White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, radio switchable, 190lm, LiFePO4 battery suitable for low temperatures -25° to 40°C



Dane techniczne



Długość (mm)	250,00
Szerokość (mm)	34,00
Wysokość (mm)	174,00
Waga (kg)	0,60
Rodzaj oprawy oświetleniowej	kombinowana awaryjna i ewakuacyjna kierunkowa ewakuacyjna awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	Bezprzewodowe monitorowanie temperatury
Wersja	oprawy plastikowe oprawy awaryjne dwustronne
Design / Seria	KS

Dane techniczne - kontynuacja




Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	RAL 9003
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Widoczność (mb)	22
Czas podtrzymania (H)	3
Źródło światła	LED (2W)
Strumień świetlny	190
Zakres napięcia (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Akumulatory (V/Ah)	3,2/3,0 LiFePO4
Stopień szczelności	IP54
Odporność na uderzenia	≥ IK03
Montaż	naścienny wpuszczany (opcjonalnie) uniwersalny sufitowy natynkowy
Min. temperatura otoczenia (°C)	-25
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA4
Producent	Schrack

Abmessungen (mm)



NLKS...

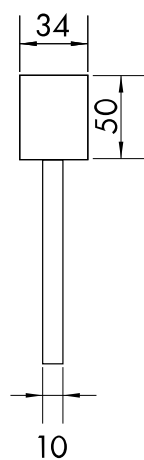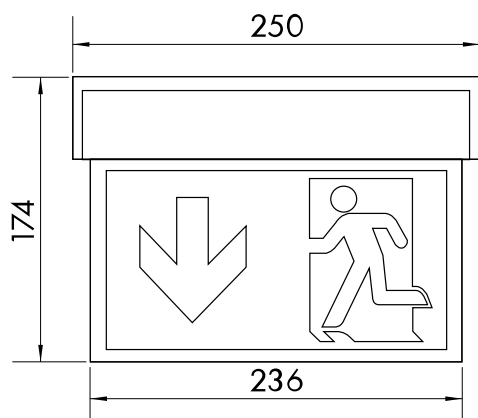

NLKME

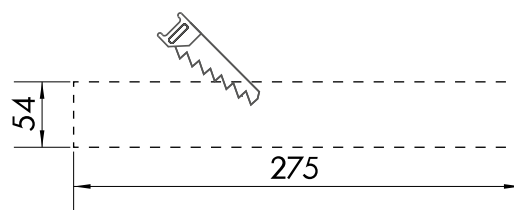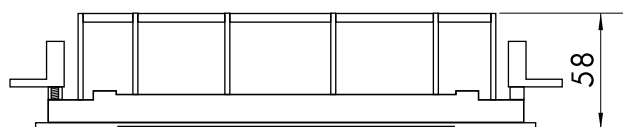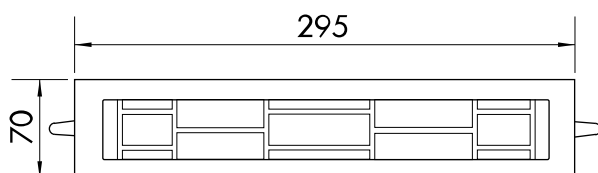

Bohrabstände (mm)

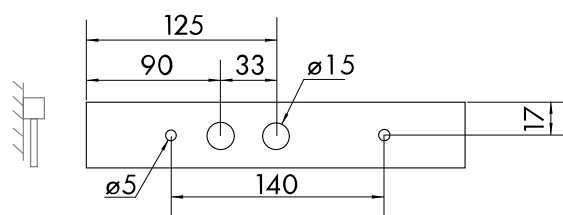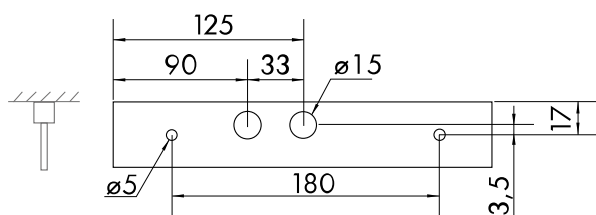

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire KSC WirelessControl LED 3h 230V AC TT White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, radio switchable, 190lm, LiFePO4 battery suitable for low temperatures -25° to 40°C	NLKST03WL
Dodatkowe akcesoria	
Accu LiFePO4 3.2V 3.3Ah low temp for LED luminaires LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
Piktogram podłączany lewy górny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Piktogram podłączany lewy dolny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Piktogram podłączany prawy górny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Piktogram podłączany prawy dolny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Design pair of pendants 500 mm white, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWMKMS
Zawiesie dla opraw KD,KS,LI,M,	NLBALL1
Zawiesie łańcuchowe LI-DESIGN	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4