

Dane techniczne dla produktu: NLKSW003SC

Oprawa ewakuacyjna KS LED, biała 3h, z autotestem

Erkennungsweite: 22m




Dane techniczne

Długość (mm)	250,00
Szerokość (mm)	34,00
Wysokość (mm)	174,00
Waga (kg)	0,60
Rodzaj oprawy oświetleniowej	kierunkowa ewakuacyjna
EB-ZB	Oprawy autonomiczne
Funkcja	autotest
Wersja	oprawy awaryjne dwustronne
Design / Seria	KS
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	biały
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Widoczność (mb)	24
Czas podtrzymania (H)	3
Źródło światła	LED (2W)
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	4,8/0,5 NiMh
Stopień szczelności	IP54



Dane techniczne - kontynuacja

Montaż	naścienny uniwersalny sufitowy natynkowy sufitowy wpuszczany
AA Class E 8101	AA4
Producent	Schrack

Dimensions (mm)

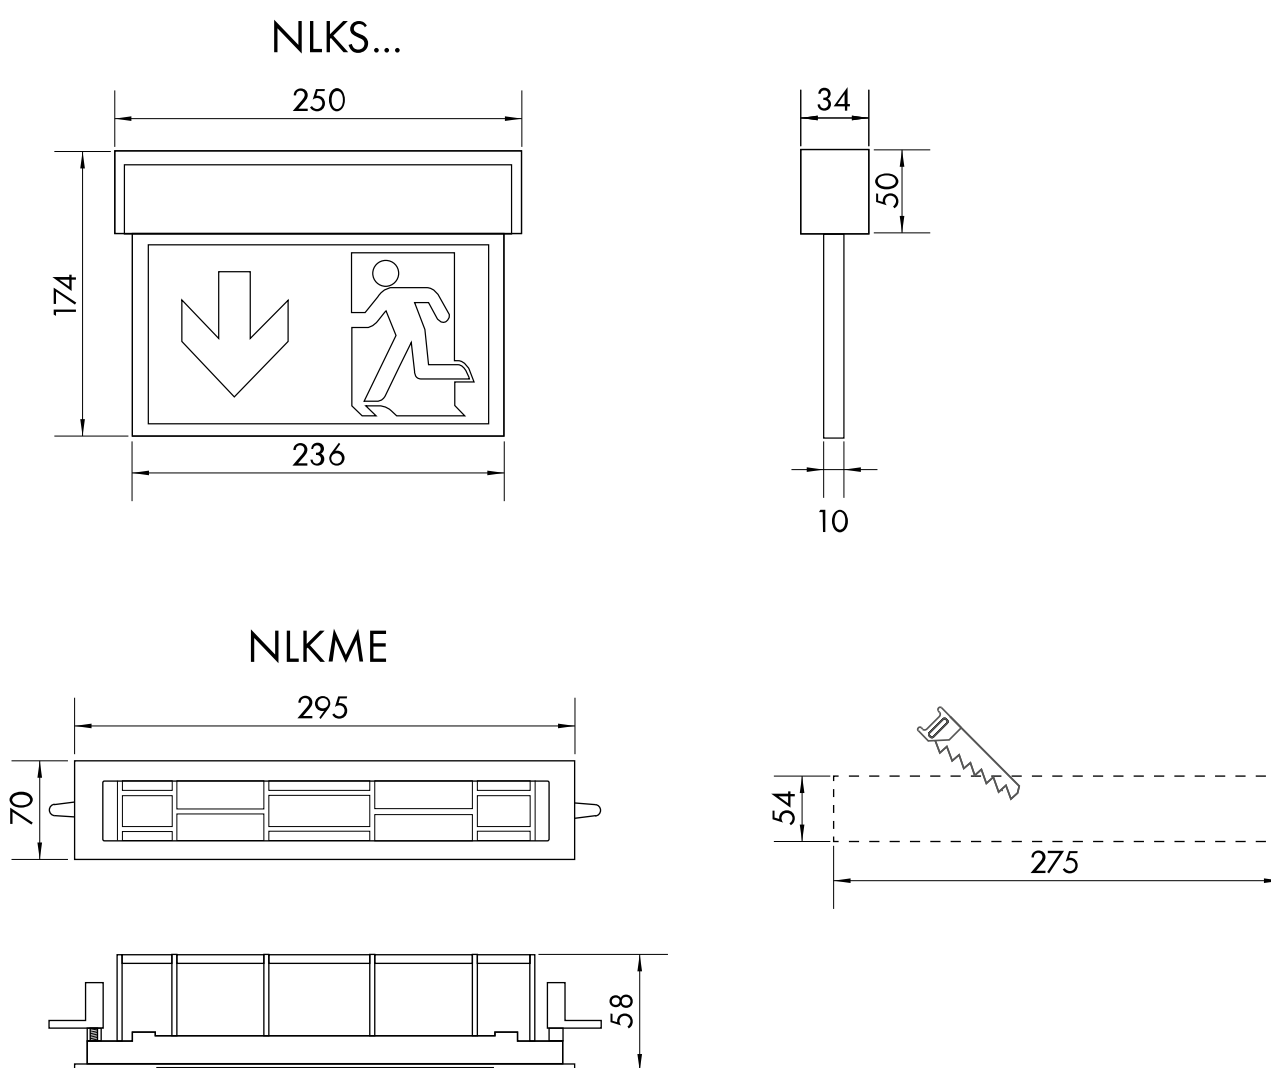

Drilling distances (mm)

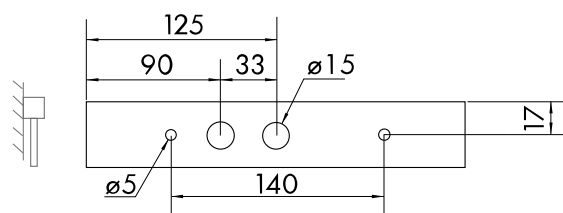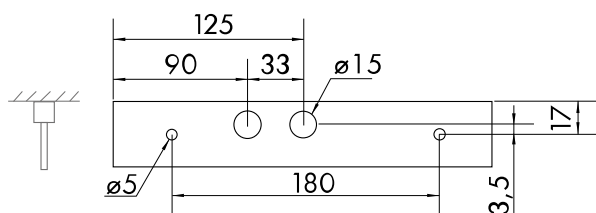

Lista produktów

OPIS	Nr katalogowy
Oprawa ewakuacyjna KS LED, biała 3h, z autotestem Erkennungsweite: 22m	NLKSU003SC
Dodatkowe akcesoria	
Accu NiMH 4,8V 0,5Ah for self cont. luminaires LED KM and KS Suitable for NLKMU033SC and NLKSU003SC	NLAKKU4805
Piktogram podłączany lewy górny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Piktogram podłączany lewy dolny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Piktogram podłączany prawy górny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Piktogram podłączany prawy dolny do AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Design pair of pendants 500 mm white, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWMKS
Zawiesie dla opraw KD, KS, LI, M,	NLBALL1
Zawiesie łańcuchowe LI-DESIGN	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4