

Dane techniczne dla produktu: NLKWC039EL

Emergency luminaire KW clear 4x1W ERT-LED 230V EL, ceiling

With exchangeable lenses, corridor lenses in scope of delivery included, with supervision - centrally switchable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, IP54, protection class II, 520lm




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	0,70
Rodzaj oprawy oświetleniowej	awaryjna
EB-ZB	Zasilacze centralne do opraw
Funkcja	z monitorowaniem - przełączane centralnie
Wersja	oprawy plastikowe
Design / Seria	KW
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	biały
Widoczność (mb)	16

Dane techniczne - kontynuacja

Źródło światła	ERT-LED (4W)
Strumień świetlny	520
Zakres napięcia (V)	230V AC 50Hz ±20%; 230V DC ±20%
Stopień szczelności	IP54
Odporność na uderzenia	IK06
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-20
Maks. temperatura otoczenia (°C)	40
AA klasa E 8101	AA3 AA4 AA5
Producent	Schrack

Rysunek wymiarowy: Emergency luminaire KW clear 4x1W ERT-LED 230V EL, ceiling

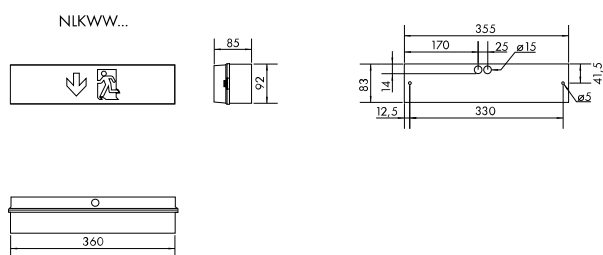

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	4,18	10,19	9,85	9,45	3,79
2,50	4,50	11,25	10,77	10,21	4,14
3,00	4,75	12,06	11,52	10,97	4,47
3,50	4,95	12,69	12,15	11,68	4,69
4,00	5,09	13,22	12,77	12,36	4,81
5,00	5,56	14,04	13,68	13,30	4,92
6,00	4,70	14,52	14,18	13,76	4,76
7,00	4,36	14,60	14,28	13,96	4,02
8,00	3,74	14,86	13,70	13,64	3,67
9,00	2,31	13,05	12,96	12,87	2,25

Abstandstabelle mit Korridorlinsen quer (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	7,71	17,75	12,86	7,90	3,11
2,50	8,82	20,30	14,34	8,45	3,32
3,00	9,84	22,58	15,73	8,99	3,43
3,50	10,76	24,81	17,06	9,37	3,49
4,00	11,60	26,89	18,26	9,63	3,50
5,00	8,18	30,62	19,76	9,88	3,46
6,00	5,40	27,98	11,92	9,90	3,18
7,00	3,12	13,80	12,12	9,78	2,62

Abstandstabelle Runde-Linsen (NLLYSR4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	4,37	9,66	9,51	9,32	4,21
2,50	5,15	11,36	11,13	10,85	4,99
3,00	5,87	12,86	12,67	12,47	5,68
3,50	6,53	14,47	14,25	14,01	6,31
4,00	7,12	15,95	15,70	15,44	6,80
5,00	7,04	18,58	18,20	17,84	5,66
6,00	1,14	15,88	15,48	15,18	1,16

Abstandstabelle Spot-Linsen (NLLSYSS4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	1,84	4,46	4,46	4,46	1,84
2,50	2,30	5,58	5,58	5,58	2,30
3,00	2,77	6,70	6,70	6,70	2,77
3,50	3,12	7,40	7,40	7,40	3,12
4,00	3,34	7,82	7,82	7,82	3,34
5,00	3,86	8,86	8,86	8,86	3,86
6,00	4,28	9,84	9,84	9,84	4,28
7,00	4,68	10,90	10,90	10,90	4,68
8,00	5,00	11,78	11,78	11,78	5,00
9,00	5,22	12,51	12,51	12,51	5,22
10,00	5,36	13,28	13,28	13,28	5,36
12,00	5,43	14,49	14,49	14,49	5,43
14,00	5,20	15,16	15,16	15,16	5,20
16,00	4,72	15,36	15,36	15,36	4,72

Abstandstabelle Hohe-Flur-Linsen (NLLSYSH4-- separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,68	13,09	9,59	6,03	2,24
3,00	6,62	15,30	11,10	6,86	2,51
3,50	7,18	16,77	11,90	7,04	2,48
4,00	7,66	18,12	12,61	7,11	2,42
5,00	8,48	20,40	13,74	7,00	1,92
6,00	9,14	22,30	14,06	6,22	2,02
7,00	9,62	23,92	14,58	5,46	2,14
8,00	9,84	25,28	14,98	5,58	2,16
9,00	10,02	26,46	15,24	5,88	2,25
10,00	10,16	27,24	15,36	6,08	2,28
12,00	9,00	28,11	14,91	6,24	2,22
14,00	7,92	28,20	14,36	6,52	1,96
16,00	5,72	25,96	13,16	6,48	1,40

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire KW clear 4x1W ERT-LED 230V EL, ceiling	
With exchangeable lenses, corridor lenses in scope of delivery included, with supervision - centrally switchable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, IP54, protection class II, 520lm	NLKWC039EL
Dodatkowe akcesoria	
Ball protection gasket for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
4 LED changeable lenses: Corridor-illuminating escape routes Suitable for emergency luminaires with exchangeable lens system	NLLSYSF4
4 LED changeable lens: Round-illuminating circular surfaces Suitable for emergency luminaires with changeable lens system	NLLSYSR4
4 LED changeable lens: Spot area illumination for high rooms Suitable for emergency luminaires with changeable lens system	NLLSYSS4
4 LED changeable lens: Beam-asymmetric illumination For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLLSYSB4