

Dane techniczne dla produktu: NLKWD433SC

Emerg.lum. KW Autotest 4x1 W ERT-LED 3h 230V AC ceiling m.

With exchangeable lenses, corridor lenses in scope of delivery included, 1 h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	139,00
Waga (kg)	0,80
Rodzaj oprawy oświetleniowej	Oprawa kombinowana awaryjna i ewakuacyjna Oprawa awaryjna Oprawa kierunkowa ewakuacyjna
EB-ZB	Oprawy autonomiczne
Funkcja	autotest
Wersja	oprawy plastikowe
Design / Seria	KW

Dane techniczne - kontynuacja

Bezhalogenowy	Housing made of halogen-free plastic
Kolor	biały
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	1h: 520;3h: 520;8h: 200
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Stopień szczelności	IP54
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-5
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA4
Producent	Schrack

Rysunek wymiarowy: Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m.

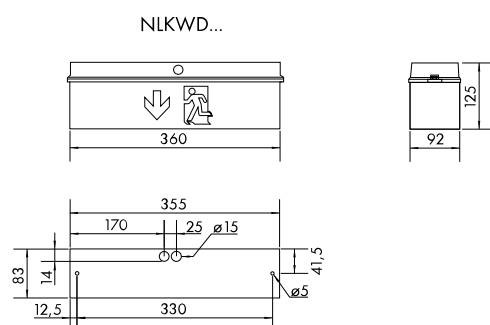

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Lista produktów

OPIS	Nr katalogowy
Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m. With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKWD433SC
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L