

Dane techniczne dla produktu: NLKWD433WL

Emergency luminaire KW Wireless 4x1W ERTLED 3h 230V ceiling

With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO₄, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, radio switchable, dimmable, 520lm, WirelessControl Professional type




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	139,00
Waga (kg)	1,30
Rodzaj oprawy oświetleniowej	kierunkowa ewakuacyjna awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	sterowanie bezprzewodowe
Wersja	oprawy plastikowe
Design / Seria	KW
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego

Dane techniczne - kontynuacja

Kolor	biały
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	520
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Stopień szczelności	IP54
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-5
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA4
Producent	Schrack

Rysunek wymiarowy: Emergency luminaire KW Wireless 4x1W ERTLED 3h 230V ceiling

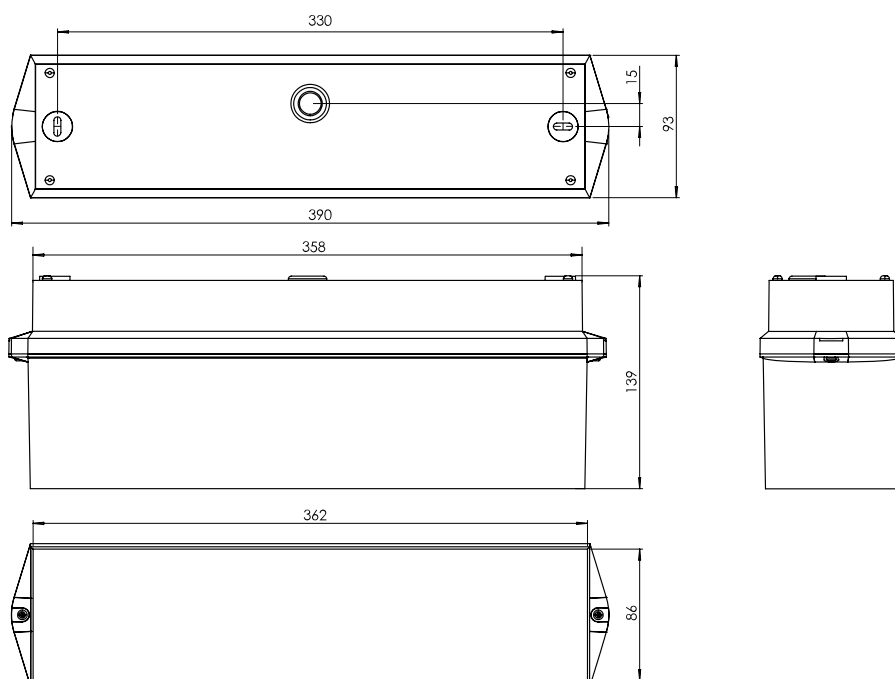

Abstandstabelle mit Korridorlinsen quer (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 1h/3h Autonomiezeit

Montagehöhe [m]					
2,00	3,87	10,02	8,29	6,56	2,53
2,50	4,00	10,59	8,78	6,99	2,60
3,00	4,02	10,97	9,10	7,25	2,57
3,50	3,95	11,20	9,28	7,36	2,44
4,00	3,77	11,29	9,32	7,34	2,19
5,00	2,88	11,04	8,96	6,86	0,94

Abstandstabelle ohne eingesetzte Linsen - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 1h/3h Autonomiezeit

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire KW Wireless 4x1W ERTLED 3h 230V ceiling With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO4, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, radio switchable, dimmable, 520lm, WirelessControl Professional type	NLKWD433WL
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
4 LED changeable lenses: Corridor-illuminating escape routes Suitable for emergency luminaires with exchangeable lens system	NLSYSF4
4 LED changeable lens: Round-illuminating circular surfaces Suitable for emergency luminaires with changeable lens system	NLSYSR4
4 LED changeable lens: Spot area illumination for high rooms Suitable for emergency luminaires with changeable lens system	NLSYSS4
4 LED changeable lens: Beam-asymmetric illumination For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLSYSB4