

Dane techniczne dla produktu: NLKWD818--

Self-contained luminaire KW 8W 230V EVG ceiling mount.

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m




Dane techniczne

rodzaj oprawy oświetleniowej	kombinowane bezpieczeństwo i RZ oprawy bezpieczeństwa oprawy oświetlenia awaryjnego
EB-ZB	Zasilacze centralne do opraw
funkcja	podstawowa
rodzaj/typ	oprawy plastikowe
typ/konstrukcja	KW
Kolor	Biały
odległość wykrywania (mb)	16
Oświetlenie	T5 (8W)
Lumen	450
zakres napięcia (V)	230V AC 50Hz ±20%; 230V DC ±20%
Stopień szczelności	IP54

Dane techniczne - kontynuacja

montaż	natynkowy
Waga (kg)	0,70

Dimensions (mm)

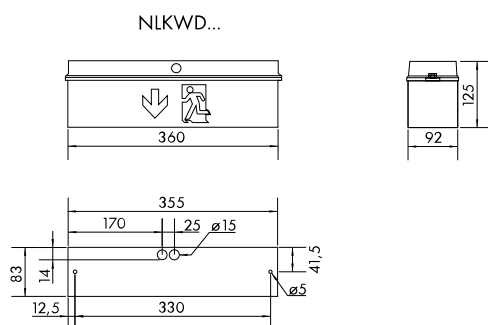

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,42	7,97	6,17	2,30
2,50	3,57	9,89	8,35	6,51	2,33
3,00	3,58	10,18	8,56	6,68	2,26
3,50	3,38	10,30	8,61	6,70	2,02
4,00	3,13	10,27	8,50	6,57	1,62

Lista produktów

OPIS	Nr katalogowy
Self-contained luminaire KW 8W 230V EVG ceiling mount. suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD818
Dodatkowe akcesoria	
Crystal-clear wall cover for KW	NLKCW
Ball protection gasket for KW	NLBKW
Zestaw piktogramów dla opraw KW	NLKW0103
High Cover for ceiling mounting of emerg. lamp KW, opaque	NLKWH
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001