

Dane techniczne dla produktu: NLKWD833SC

Self-contained luminaire KW self-contr.8W/3h 230V ceiling m.

suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m



Dane techniczne


rodzaj oprawy oświetleniowej	kombinowane bezpieczeństwo i RZ oprawy bezpieczeństwa oprawy oświetlenia awaryjnego
EB-ZB	Oprawy autonomiczne
funkcja	autotest
rodzaj/typ	oprawy plastikowe
typ/konstrukcja	KW
Bezhalogenowy	Housing made of halogen-free plastic
Kolor	Biały
odległość wykrywania (mb)	16
czas podtrzymania (H)	3
Oświetlenie	T5 (8W)
Lumen	180

Dane techniczne - kontynuacja

zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	4,8/2,4 NiMh
Stopień szczelności	IP54
montaż	natynkowy
AA Class E 8101	AA5
Waga (kg)	0,70

Dimensions (mm)

NLKWD...

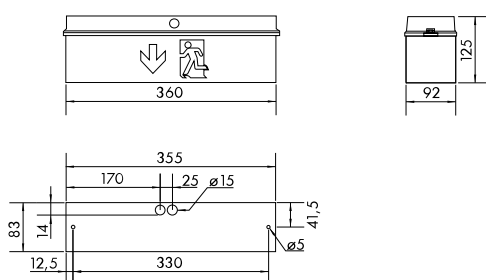

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,75	7,60	6,41	5,00	1,74
2,50	2,68	7,82	6,56	5,11	1,62
3,00	2,43	7,83	6,49	5,02	1,27
3,50	1,86	7,64	6,21	4,72	0,43
4,00	0,00	5,81	3,78	3,92	0,00

Lista produktów

OPIS	Nr katalogowy
Self-contained luminaire KW self-contr.8W/3h 230V ceiling m. suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side, viewing distance: 16m	NLKWD833SC
Dodatkowe akcesoria	
Crystal-clear wall cover for KW	NLKWC
Ball protection gascet for KW	NLBKW
Zestaw piktogramów dla opraw KW	NLKW0103
High Cover for ceiling mounting of emerg. lamp KW, opaque	NLKWH
Accu NiMH 4,8V 2,4Ah for self cont.luminaires 8W 3h NLxxx833	NLAKKU4824
Zawiesie 500 mm,kolor biały,okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001