

Dane techniczne dla produktu: NLKWIC433W

Emerg.lum. KWI clear WirelessControl 4x1W ERT-LED 3h 230V

With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO₄, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, dimmable, 520lm



Informacja o produkcie

When used with pictograms, it is recommended not to use exchangeable lenses for uniform illumination. When used as an emergency luminaire, the luminaire can be operated without or with exchangeable lenses - see luminaire spacing tables in the online data sheet.




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	0,70
Rodzaj oprawy oświetleniowej	awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	sterowanie bezprzewodowe

Dane techniczne - kontynuacja

Wersja	oprawy plastikowe
Design / Seria	KWI
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	RAL 9003
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	520
Zakres napięcia (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Akumulatory (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Stopień szczelności	IP65
Odporność na uderzenia	IK06
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-5
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA4
Producent	Schrack

Dimensions (mm)

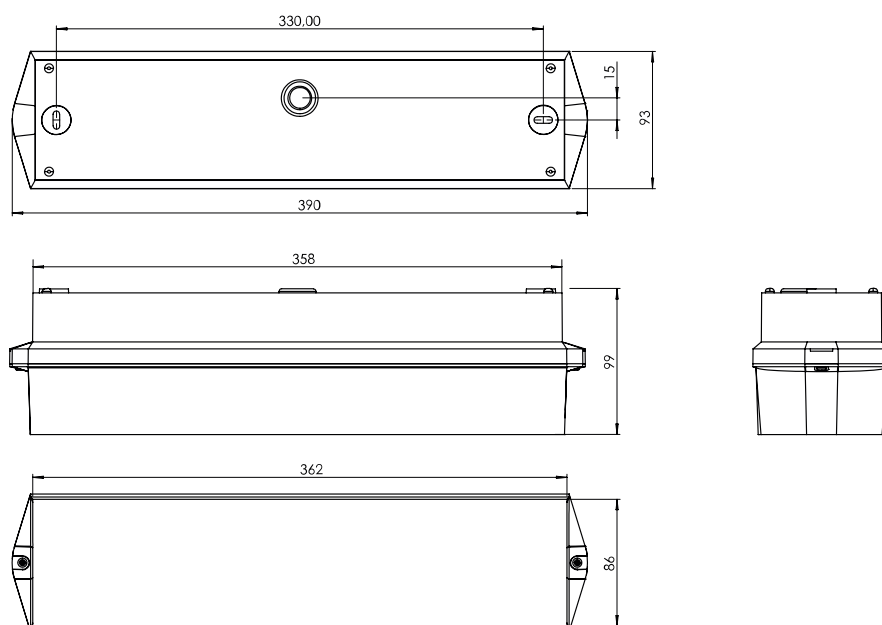

Abstandstabelle ohne Linsen - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	4,14	10,15	9,84	9,45	3,79
2,50	4,46	11,2	10,77	10,21	4,14
3,00	4,73	12,01	11,52	10,97	4,47
3,50	4,94	12,63	12,15	11,68	4,67
4,00	5,05	13,18	12,77	12,36	4,79
5,00	5,36	14,04	13,66	13,28	4,89
6,00	4,7	14,45	14,12	13,72	4,72
7,00	4,34	14,61	14,29	13,9	4,03
8,00	3,7	14,8	13,71	13,63	3,54
9,00	2,17	13,05	12,97	12,89	2,24

Abstandstabelle mit Korridorlinsen (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	7,36	17,11	12,52	7,88	3,09
2,50	8,47	19,63	14,05	8,45	3,28
3,00	9,46	21,93	15,41	8,95	3,39
3,50	10,37	24,15	16,69	9,32	3,43
4,00	11,2	26,19	17,85	9,58	3,45
5,00	4,73	24,45	13,86	9,8	3,38
6,00	5,23	23,48	11,64	9,82	3,17
7,00	2,93	13,48	11,45	9,69	2,58

Abstandstabelle Runde-Linse (NLLSYSR4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h Autonomiezeit

					
2,00	4,37	9,66	9,50 9,29 4,19	4,89	1,89
2,50	5,14	11,36	11,13 10,84 4,98	6,12	2,36
3,00	5,86	12,86	12,66 12,46 5,68	7,34	2,83
3,50	6,51	14,46	14,24 14,01 6,31	8,57	3,3
4,00	7,1	15,94	15,69 15,44 6,80	9,79	3,78
5,00	4,53	18,43	16,35 17,85 5,61	10,53	4,04
6,00	0,96	15,82	15,42 15,08 1,07	11,02	4,18

**Abstandstabelle Spot-Linse (NLLSYSS4 - separat zu bestellen) - Min.
Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h
Autonomiezeit**

					
2,00	1,84	4,46	4,46	4,46	1,84
2,50	2,3	5,58	5,58	5,58	2,3
3,00	2,77	6,7	6,7	6,7	2,77
3,50	3,08	7,33	7,33	7,33	3,08
4,00	3,3	7,75	7,75	7,75	3,3
5,00	3,84	8,81	8,81	8,81	3,84
6,00	4,26	9,8	9,8	9,8	4,26
7,00	4,65	10,85	10,85	10,85	4,65
8,00	4,97	11,74	11,74	11,74	4,97
9,00	5,21	12,49	12,49	12,49	5,21
10,00	5,35	13,27	13,27	13,27	5,35
12,00	5,4	14,46	14,46	14,46	5,4
14,00	5,18	15,16	15,16	15,16	5,18
16,00	4,69	15,36	15,36	15,36	4,69

**Abstandstabelle Hohe-Flur-Linse (NLLSYSH4 - separat zu bestellen) - Min.
Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h
Autonomiezeit**

					
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,65	13,09	9,59	6,03	2,24
3,00	6,28	14,77	10,84	6,83	2,47
3,50	6,81	16,21	11,6	6,99	2,45
4,00	7,29	17,52	12,28	7,06	2,35
5,00	8,1	19,73	13,35	6,98	1,91
6,00	8,75	21,58	13,68	6,07	2
7,00	9,11	23,16	14,24	5,46	2,12
8,00	9,33	24,52	14,54	5,55	2,16
9,00	9,51	25,69	14,72	5,88	2,23
10,00	9,27	26,29	14,82	6,08	2,29
12,00	8,41	27,15	14,19	6,24	2,22
14,00	7,09	26,85	13,73	6,51	1,92
16,00	4,53	24,91	12,22	6,48	1,36

Lista produktów

OPIS	Nr katalogowy
Emerg.lum. KWI clear WirelessControl 4x1W ERT-LED 3h 230V With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO₄, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, dimmable, 520lm	NLKWIC433W
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm,kolor biały,okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Set 2 accus LiFePO ₄ 3,2V 3,3Ah f. luminaires. w. LEO or LPK	NLAKKU323L
LiFePO ₄ - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	
4 LED changeable lenses: Corridor-illuminating escape routes	NLLSYSF4
Suitable for emergency luminaires with exchangeable lens system	
4 LED changeable lens: Round-illuminating circular surfaces	NLLSYSR4
Suitable for emergency luminaires with changeable lens system	
4 LED changeable lens: Spot area illumination for high rooms	NLLSYSS4
Suitable for emergency luminaires with changeable lens system	
4 LED changeable lens: Beam-asymmetric illumination	NLLSYSB4
For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	