


Dane techniczne dla produktu: NLKWIC539C

Emergency luminaire KWI clear 4x1W ERT-LED CC24 24V, ceiling

with supervision - centrally switchable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, IP65, IK06, protection class II, 520lm




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	0,70
Rodzaj oprawy oświetleniowej	awaryjna
EB-ZB	Zasilacze centralne do opraw
Funkcja	24V Core24 z nadzorem - przełączane centralnie
Wersja	oprawy plastikowe
Design / Seria	KWI
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	RAL 9003
Widoczność (mb)	16
Źródło światła	ERT-LED (4W)

Dane techniczne - kontynuacja

Strumień świetlny	520
Zakres napięcia (V)	24V AC
Power maintained mode (W)	5,10
Power non-maintained mode (W)	0,40
Power max. (W)	5,10
Stopień szczelności	IP65
Odporność na uderzenia	IK06
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-20
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA3 AA4 AA5
Producent	Schrack

Abmessungen (mm)

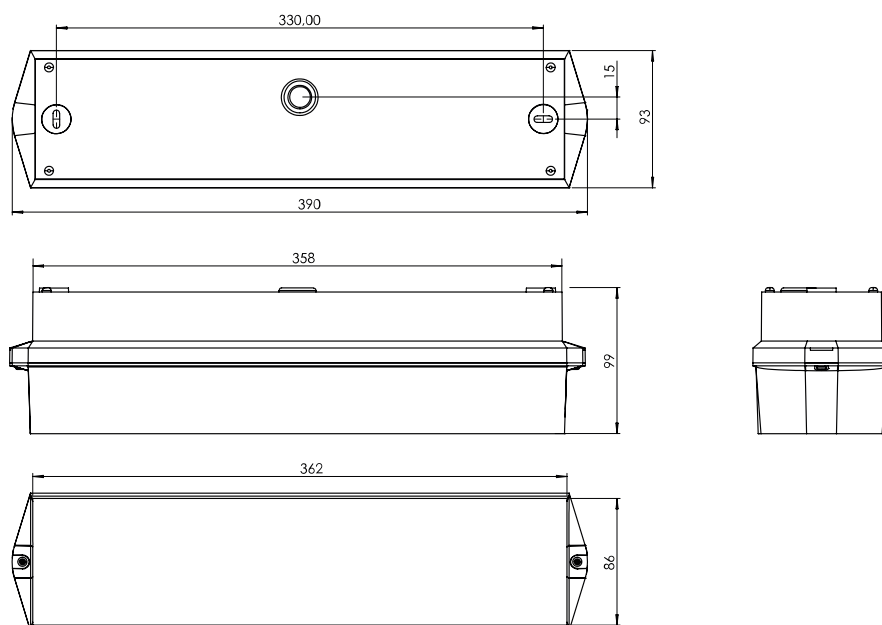

Abstandstabelle ohne Linsen - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	7,36	17,11	12,52	7,88	3,09
2,50	8,47	19,63	14,05	8,45	3,28
3,00	9,46	21,93	15,41	8,95	3,39
3,50	10,37	24,15	16,69	9,32	3,43
4,00	11,2	26,19	17,85	9,58	3,45
5,00	4,73	24,45	13,86	9,8	3,38
6,00	5,23	23,48	11,64	9,82	3,17
7,00	2,93	13,48	11,45	9,69	2,58

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire KWI clear 4x1W ERT-LED CC24 24V, ceiling with supervision - centrally switchable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, IP65, IK06, protection class II, 520lm	NLKWIC539C
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI... left, right, up, down	NLKWIPKTO
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
4 LED changeable lenses: Corridor-illuminating escape routes Suitable for emergency luminaires with exchangeable lens system	NLLSYSF4
4 LED changeable lens: Round-illuminating circular surfaces Suitable for emergency luminaires with changeable lens system	NLLSYSR4
4 LED changeable lens: Spot area illumination for high rooms Suitable for emergency luminaires with changeable lens system	NLLSYSS4
4 LED changeable lens: Beam-asymmetric illumination For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLLSYSB4