

Dane techniczne dla produktu: NLKWICC33S

Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	1,37
Rodzaj oprawy oświetleniowej	awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	Samokontrola temperatury
Wersja	oprawy plastikowe
Design / Seria	KWI


Dane techniczne - kontynuacja

Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	biały
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	1h: 520;3h: 520;8h: 200
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	9,6/2,0 NiMh
Stopień szczelności	IP65
Odporność na uderzenia	IK06
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-30
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA3 AA4 AA5
Producent	Schrack

Dimensions (mm)

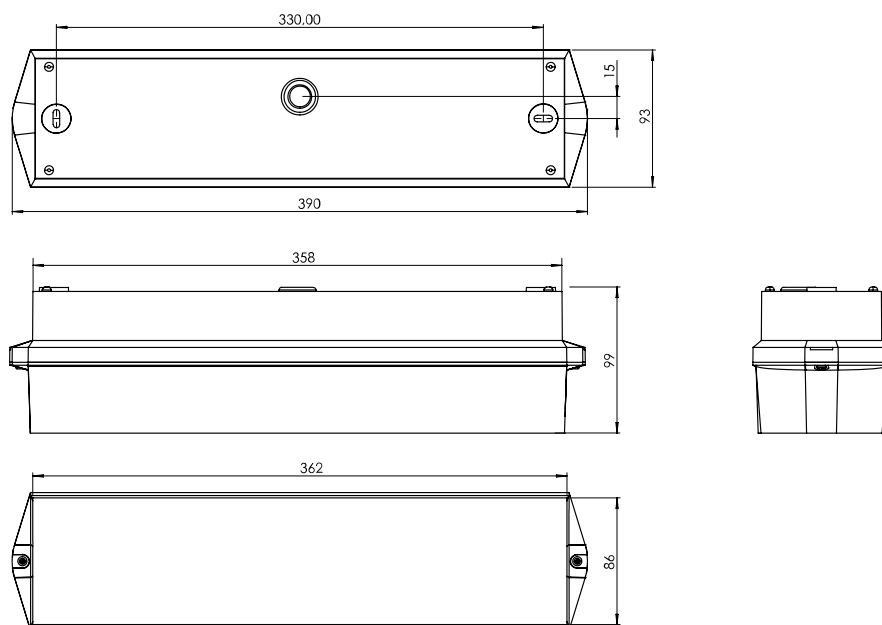

Housing IP54 for COOL version (mm)

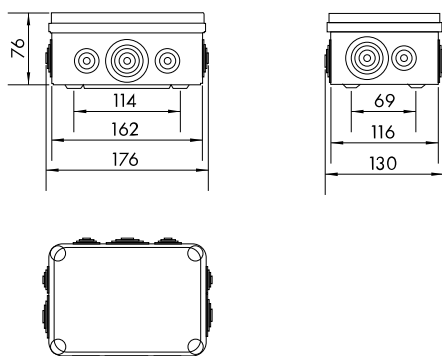

Dane techniczne: Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	7,36	17,11	12,52	7,88	3,09
2,50	8,47	19,63	14,05	8,45	3,28
3,00	9,46	21,93	15,41	8,95	3,39
3,50	10,37	24,15	16,69	9,32	3,43
4,00	11,2	26,19	17,85	9,58	3,45
5,00	4,73	24,45	13,86	9,8	3,38
6,00	5,23	23,48	11,64	9,82	3,17
7,00	2,93	13,48	11,45	9,69	2,58

Dane techniczne: Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	4,14	10,15	9,84	9,45	3,79
2,50	4,46	11,2	10,77	10,21	4,14
3,00	4,73	12,01	11,52	10,97	4,47
3,50	4,94	12,63	12,15	11,68	4,67
4,00	5,05	13,18	12,77	12,36	4,79
5,00	5,36	14,04	13,66	13,28	4,89
6,00	4,7	14,45	14,12	13,72	4,72
7,00	4,34	14,61	14,29	13,9	4,03
8,00	3,7	14,8	13,71	13,63	3,54
9,00	2,17	13,05	12,97	12,89	2,24

Dane techniczne: Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	5,94	13,92	9,74	5,61	2,08
2,50	6,72	15,99	10,91	5,89	2,09
3,00	2,79	14,44	9,43	6	2,05
3,50	3,06	13,73	6,85	6,03	1,98
4,00	2,69	7,79	6,97	5,99	1,84

Dane techniczne: Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	3,03	7,71	7,44	7,1	2,87
2,50	3,17	8,29	8,05	7,8	3,01
3,00	3,21	8,77	8,55	8,3	3,08
3,50	3,22	9,04	8,8	8,57	3,05
4,00	2,94	9,24	9,01	8,73	2,9
5,00	2,37	9,39	8,74	8,66	2,23
6,00	0,43	8,09	7,86	7,86	0,44

Dane techniczne: Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	4,37	9,66	9,50 9,29 4,19	4,89	1,89
2,50	5,14	11,36	11,13 10,84 4,98	6,12	2,36
3,00	5,86	12,86	12,66 12,46 5,68	7,34	2,83
3,50	6,51	14,46	14,24 14,01 6,31	8,57	3,3
4,00	7,1	15,94	15,69 15,44 6,80	9,79	3,78
5,00	4,53	18,43	16,35 17,85 5,61	10,53	4,04
6,00	0,96	15,82	15,42 15,08 1,07	11,02	4,18

Dane techniczne: Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	1,84	4,46	4,46	4,46	1,84
2,50	2,3	5,58	5,58	5,58	2,3
3,00	2,77	6,7	6,7	6,7	2,77
3,50	3,08	7,33	7,33	7,33	3,08
4,00	3,3	7,75	7,75	7,75	3,3
5,00	3,84	8,81	8,81	8,81	3,84
6,00	4,26	9,8	9,8	9,8	4,26
7,00	4,65	10,85	10,85	10,85	4,65
8,00	4,97	11,74	11,74	11,74	4,97
9,00	5,21	12,49	12,49	12,49	5,21
10,00	5,35	13,27	13,27	13,27	5,35
12,00	5,4	14,46	14,46	14,46	5,4
14,00	5,18	15,16	15,16	15,16	5,18
16,00	4,69	15,36	15,36	15,36	4,69

Dane techniczne: Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,65	13,09	9,59	6,03	2,24
3,00	6,28	14,77	10,84	6,83	2,47
3,50	6,81	16,21	11,6	6,99	2,45
4,00	7,29	17,52	12,28	7,06	2,35
5,00	8,1	19,73	13,35	6,98	1,91
6,00	8,75	21,58	13,68	6,07	2
7,00	9,11	23,16	14,24	5,46	2,12
8,00	9,33	24,52	14,54	5,55	2,16
9,00	9,51	25,69	14,72	5,88	2,23
10,00	9,27	26,29	14,82	6,08	2,29
12,00	8,41	27,15	14,19	6,24	2,22
14,00	7,09	26,85	13,73	6,51	1,92
16,00	4,53	24,91	12,22	6,48	1,36

Lista produktów

OPIS	Nr katalogowy
Emerg. lum. KWI clear Cool Autotest 4x1W ERT-LED 3h 230V AC With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, temp. range -30° up to 35°C, batteries and electronics in external NLKWICC33S IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm	
Dodatkowe akcesoria	
Ball protection gasket for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED Suitable for LPU module	NLAKKU9620
4 LED changeable lenses: Corridor-illuminating escape routes Suitable for emergency luminaires with exchangeable lens system	NLLSYSF4
4 LED changeable lens: Round-illuminating circular surfaces Suitable for emergency luminaires with changeable lens system	NLLSYSR4
4 LED changeable lens: Spot area illumination for high rooms Suitable for emergency luminaires with changeable lens system	NLLSYSS4
4 LED changeable lens: Beam-asymmetric illumination For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLLSYSB4