

Dane techniczne dla produktu: NLKWICT33W

Emerg.lum. KWI clear WirelessControl 4x1W ERT-LED 3h 230V TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, dimmable, 520lm




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	0,70
Rodzaj oprawy oświetleniowej	awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	beprzewodowe monitorowanie temperatury
Wersja	oprawy plastikowe
Design / Seria	KWI
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	RAL 9003

Dane techniczne - kontynuacja

Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	520
Zakres napięcia (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Akumulatory (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Stopień szczelności	IP65
Odporność na uderzenia	IK06
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-15
Maks. temperatura otoczenia (°C)	40
AA klasa E 8101	AA4
Producent	Schrack

Abmessungen (mm)

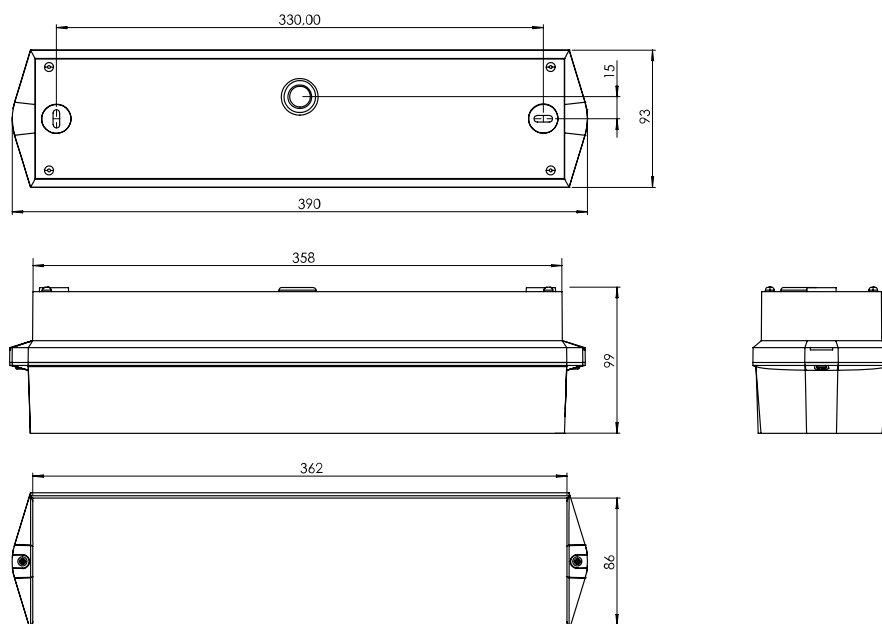

Lista produktów

OPIS	Nr katalogowy
Emerg.lum. KWI clear WirelessControl 4x1W ERT-LED 3h 230V TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, dimmable, 520lm	NLKWICT33W
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu LiFePO4 3.2V 3.3Ah low temp for LED luminaires LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
4 LED changeable lenses: Corridor-illuminating escape routes Suitable for emergency luminaires with exchangeable lens system	NLSYSF4
4 LED changeable lens: Round-illuminating circular surfaces Suitable for emergency luminaires with changeable lens system	NLSYSR4
4 LED changeable lens: Spot area illumination for high rooms Suitable for emergency luminaires with changeable lens system	NLSYSS4
4 LED changeable lens: Beam-asymmetric illumination For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLSYSB4