


Dane techniczne dla produktu: NLKWIDC33S

Emerg. lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC ceil.

1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm

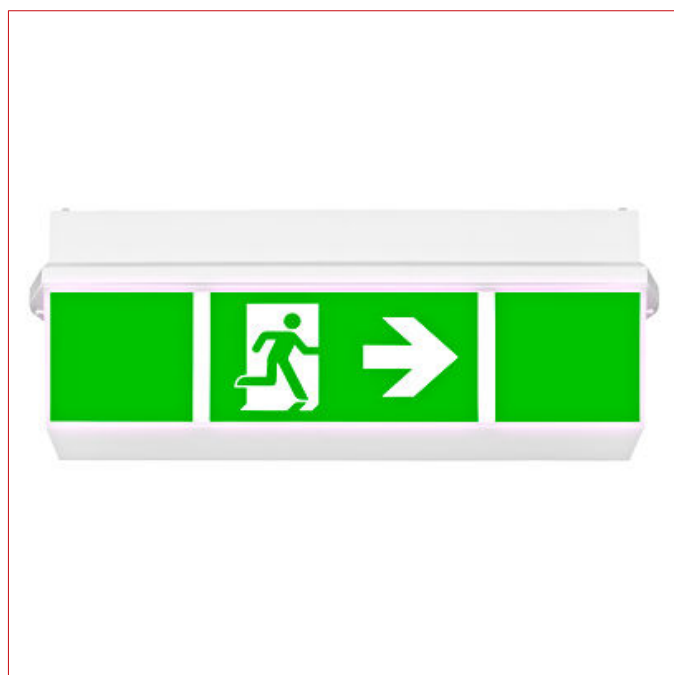

Informacja o produkcie

When used with pictograms, it is recommended not to use exchangeable lenses for uniform illumination. When used as an emergency luminaire, the luminaire can be operated without or with exchangeable lenses - see luminaire spacing tables in the online data sheet.




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	1,37


Dane techniczne - kontynuacja

Rodzaj oprawy oświetleniowej	kombinowana awaryjna i ewakuacyjna kierunkowa ewakuacyjna awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	samokontrola temperatury
Wersja	oprawy plastikowe
Design / Seria	KWI
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	biały
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	1h: 520;3h: 520;8h: 200
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	9,6/2,0 NiMh
Stopień szczelności	IP65
Odporność na uderzenia	IK06
Montaż	sufitowy natynkowy
Min. temperatura otoczenia (°C)	-30
Maks. temperatura otoczenia (°C)	40
AA klasa E 8101	AA3 AA4 AA5
Producent	Schrack

Dimensions (mm)

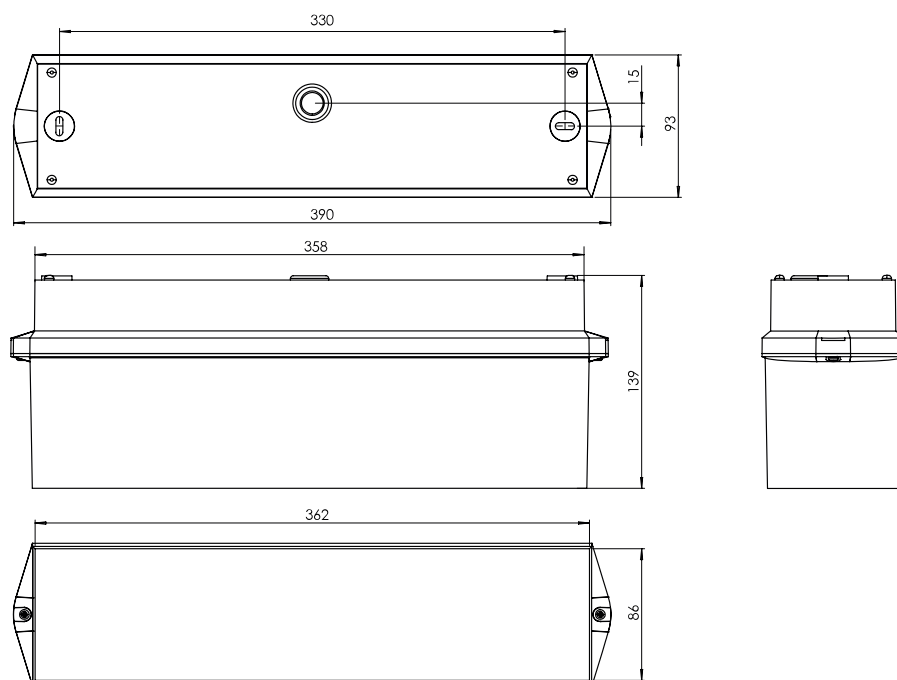

Housing IP54 for COOL version (mm)

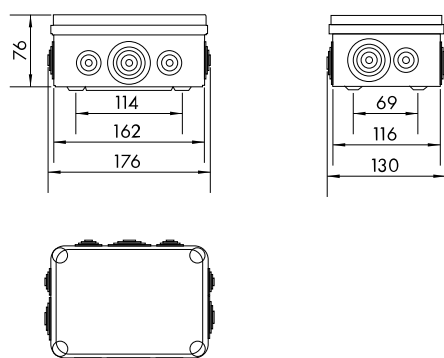

Dane techniczne: Emerg. lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC ceil.

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Dane techniczne: Emerg. lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC ceil.

Montagehöhe [m]					
2,00	2,52	6,89	6,02	5,20	1,89
2,50	2,44	7,10	6,21	5,36	1,79
3,00	2,20	7,11	6,20	5,33	1,53
3,50	1,68	6,93	5,99	5,10	0,97

Lista produktów

OPIS	Nr katalogowy
Emerg. lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC ceil. 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKWIDC33S
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPKTO
Zawiesie 500 mm,kolor biały,okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED Suitable for LPU module	NLAKKU9620