

Dane techniczne dla produktu: NLKWIWC33S

Emerg. Lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC wall

1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm

Informacja o produkcie

When used with pictograms, it is recommended not to use exchangeable lenses for uniform illumination. When used as an emergency luminaire, the luminaire can be operated without or with exchangeable lenses - see luminaire spacing tables in the online data sheet.




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	1,37
Rodzaj oprawy oświetleniowej	kombinowana awaryjna i ewakuacyjna kierunkowa ewakuacyjna awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	wersja SelfControl Cool
Wersja	oprawy plastikowe
Design / Seria	KWI
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	biały
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	1h: 520;3h: 520;8h: 200
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	9,6/2,0 NiMh
Stopień szczelności	IP65
Montaż	naścienny sufitowy natynkowy
Min. temperatura otoczenia (°C)	-30


Dane techniczne - kontynuacja

Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA3 AA4 AA5
Producent	Schrack

Dimensions (mm)

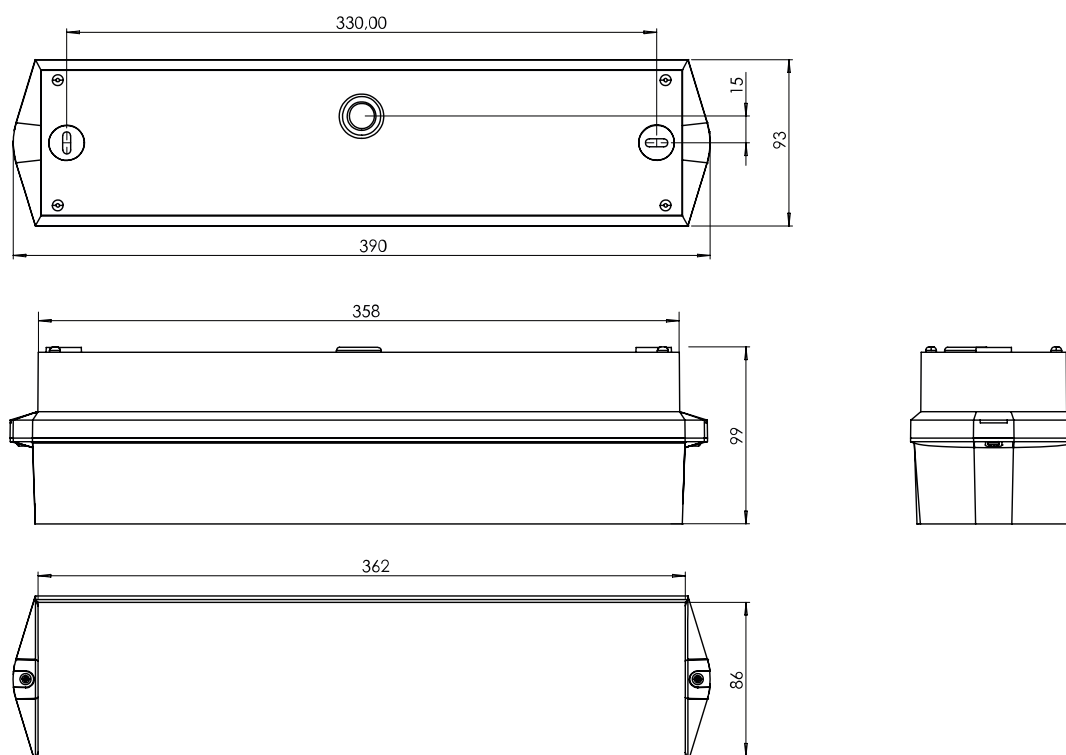

Housing IP54 for COOL version (mm)

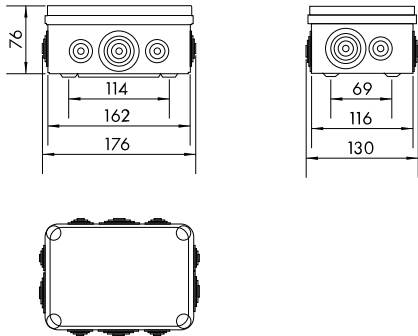

Dane techniczne: Emerg. Lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC wall

Montagehöhe [m]					
2,00	2,52	6,89	6,02	5,20	1,89
2,50	2,44	7,10	6,21	5,36	1,79
3,00	2,20	7,11	6,20	5,33	1,53
3,50	1,68	6,93	5,99	5,10	0,97

Dane techniczne: Emerg. Lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC wall

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Lista produktów

OPIS	Nr katalogowy
Emerg. Lum. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC wall 1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) NLKWIWC33S to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm	
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED Suitable for LPU module	NLAKKU9620