


Dane techniczne dla produktu: NLKWIWT33S

Emerg.lum. KWI Autotest 4x1W ERTLED 3h 230V AC wall m. TT

With 2x 3,2/3,3Ah LiFePO₄ batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	0,70
Rodzaj oprawy oświetleniowej	kombinowana awaryjna i ewakuacyjna kierunkowa ewakuacyjna awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	samokontrola temperatury
Wersja	oprawy plastikowe
Design / Seria	KWI

Dane techniczne - kontynuacja

Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego
Kolor	RAL 9003
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Widoczność (mb)	16
Źródło światła	ERT-LED (4W)
Strumień świetlny	1h: 520;3h: 520;8h: 210
Zakres napięcia (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,90
Power non-maintained mode (W)	2
Power max. (W)	7,30
Akumulatory (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Stopień szczelności	IP65
Odporność na uderzenia	IK06
Montaż	naścienny sufitowy natynkowy
Min. temperatura otoczenia (°C)	-15
Maks. temperatura otoczenia (°C)	40
AA klasa E 8101	AA4
Producent	Schrack

Dimensions (mm)

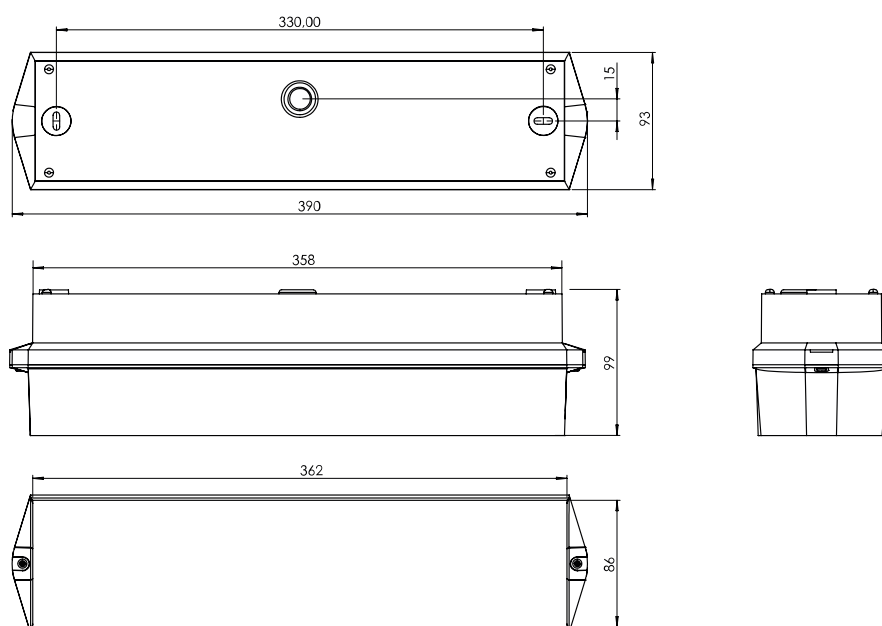

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 8h

					
2,00	2,64	7,02	6,57	6,07	2,32
2,50	2,68	7,4	6,94	6,44	2,35
3,00	2,6	7,61	7,14	6,64	2,28
3,50	2,4	7,65	7,18	6,69	2,08
4,00	2,03	7,55	7,07	6,59	1,72

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2,00	3,26	8,4	7,82	7,17	2,84
2,50	3,41	8,99	8,4	7,75	2,99
3,00	3,48	9,41	8,82	8,17	3,06
3,50	3,46	9,7	9,1	8,46	3,04
4,00	3,36	9,87	9,26	8,62	2,95
5,00	2,85	9,84	9,23	8,61	2,45
6,00	1,47	9,33	8,73	8,14	1,18

Lista produktów

OPIS	Nr katalogowy
Emerg.lum. KWI Autotest 4x1W ERTLED 3h 230V AC wall m. TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm	NLKWIWT33S
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI.. left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm,kolor biały,okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu LiFePO4 3.2V 3.3Ah low temp for LED luminaires LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV