


Dane techniczne dla produktu: NLKWIWT33W

Emergency luminaire KWI Wireless 4x1W ERTLED 3h 230V wall TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, dimmable, 520lm, WirelessControl Professional type




Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	1,30
Rodzaj oprawy oświetleniowej	kierunkowa ewakuacyjna awaryjna
EB-ZB	Oprawy autonomiczne
Funkcja	Bezprzewodowe monitorowanie temperatury
Wersja	oprawy plastikowe
Design / Seria	KWI
Bezhalogenowy	obudowa wykonana z tworzywa sztucznego bezhalogenowego

Dane techniczne - kontynuacja

Kolor	RAL 9003
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	ERT-LED (4W)
Strumień świetlny	520
Zakres napięcia (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Akumulatory (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Stopień szczelności	IP65
Odporność na uderzenia	IK06
Montaż	naścienny sufitowy natynkowy
Min. temperatura otoczenia (°C)	-15
Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA4
Producent	Schrack

Abmessungen (mm)

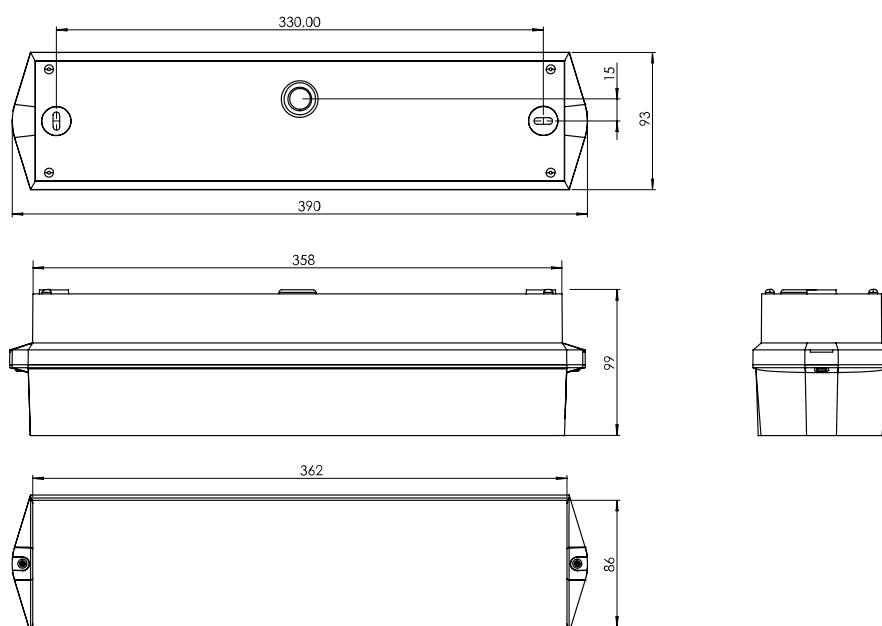

Abstandstabelle mit Korridorlinsen (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	3,81	9,78	8,65	7,44	2,95
2,50	4	10,44	9,29	8,06	3,12
3,00	4,1	10,93	9,77	8,52	3,21
3,50	4,12	11,28	10,11	8,84	3,22
4,00	4,06	11,52	10,34	9,05	3,15
5,00	3,66	11,63	10,43	9,12	2,75
6,00	2,66	11,29	10,08	8,75	1,78

Abstandstabelle ohne Linsen - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	3,8	9,67	8,94	8,12	3,26
2,50	4,03	10,41	9,68	8,85	3,49
3,00	4,18	10,98	10,25	9,42	3,64
3,50	4,25	11,43	10,68	9,86	3,71
4,00	4,26	11,76	11	10,18	3,72
5,00	4,06	12,1	11,33	10,51	3,53
6,00	3,52	12,05	11,26	10,46	2,99
7,00	2,34	11,59	10,81	10,03	1,85

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire KWI Wireless 4x1W ERTLED 3h 230V wall TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, dimmable, 520lm, WirelessControl Professional type	NLKWIWT33W
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Pictogram set for NLKWI... left, right, up, down	NLKWIPIKTO
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu LiFePO4 3.2V 3.3Ah low temp for LED luminaires LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T