


Dane techniczne dla produktu: NLKWW001SC

Emergency luminaire KW Autotest LED 3h 230V AC wall mount

1h/3h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm

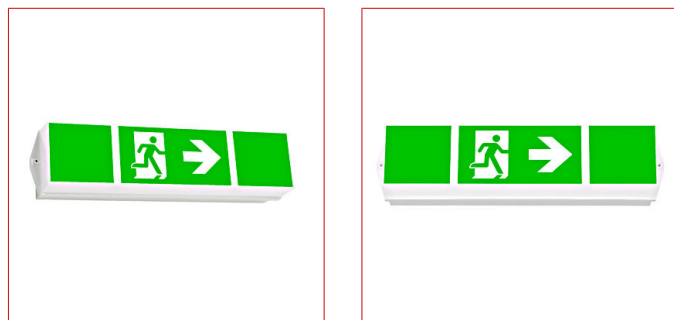


Dane techniczne

Długość (mm)	390,00
Szerokość (mm)	93,00
Wysokość (mm)	99,00
Waga (kg)	1,30
Rodzaj oprawy oświetleniowej	Oprawa kierunkowa ewakuacyjna
EB-ZB	Oprawy autonomiczne
Funkcja	autotest
Wersja	oprawy plastikowe
Design / Seria	KW
Bezhalogenowy	Housing made of halogen-free plastic
Kolor	Biały
Widoczność (mb)	16
Czas podtrzymania (H)	3
Źródło światła	LED (3W)
Strumień świetlny	1h: 300;3h: 300
Zakres napięcia (V)	230V AC 50Hz ±20%
Akumulatory (V/Ah)	9,6/2,0 NiMh
Stopień szczelności	IP65
Montaż	Sufitowy natynkowy Naścienny
Min. temperatura otoczenia (°C)	-5

Dane techniczne - kontynuacja

Maks. temperatura otoczenia (°C)	40
AA Class E 8101	AA4
Producent	Schrack

Abmessungen (mm)

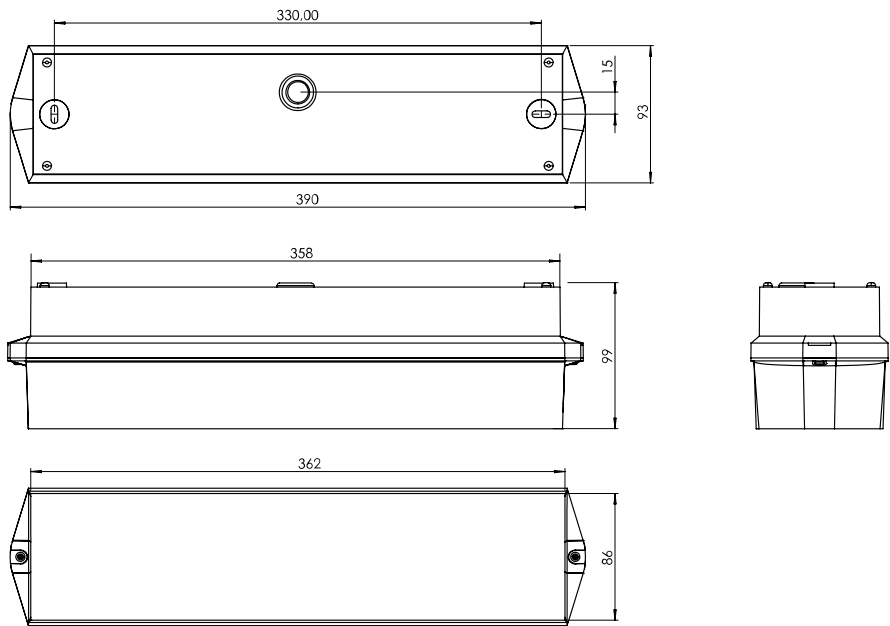

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,31	8,48	7,84	7,17	2,84
2,50	3,46	9,07	8,42	7,75	2,99
3,00	3,52	9,49	8,84	8,17	3,06
3,50	3,51	9,78	9,12	8,46	3,05
4,00	3,41	9,94	9,28	8,62	2,95
5,00	2,90	9,90	9,26	8,60	2,46
6,00	1,60	9,40	8,76	8,14	1,24

Abstandstabelle 8h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	2,12	5,84	5,45	5,04	1,84
2,50	2,02	6,01	5,61	5,22	1,75
3,00	1,76	5,98	5,58	5,20	1,50
3,50	1,20	5,67	5,36	4,99	0,97

Lista produktów

OPIS	Nr katalogowy
Emergency luminaire KW Autotest LED 3h 230V AC wall mount 1h/3h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm	NLKWW001SC
Dodatkowe akcesoria	
Ball protection gascet for KW and C1	NLBKW
Zawiesie 500 mm, kolor biały, okablowane	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED Suitable for LPU module	NLAKKU9620