

Dane techniczne dla produktu: SR1426110S

SORAX rama 19" RAL7035

600x1000x2000mm SZ/GŁ/WYS

42U, rama podstawowa bez elementów obudowy



SCHRACK-Info

SORAX Server Enclosure


- Powder-coated enclosure (coarse structure - glossy)
- Enclosure: 12-fold profiled and welded
- Material: 1.5 - 2.5mm FE
- Color: Light grey RAL7035
- UV-resistant
- Maximum load with even distribution using cranked 19" profile rails: 2.000 kg
- Protection class: IP20 / IP54 depending on design
- Degree of protection enclosure: IK10
- Tested and built according to EN 62208 empty enclosure
- Installation height max. 2.000m above sea level
- Doors not included (can be ordered optionally)
- Side panels not included (can be ordered optionally)
- Base plate not included (can be ordered optionally)
- Roof plate not included (can be ordered optionally)
- 19" profile rails (4 pieces), galvanised and cranked (L-profile rails can be ordered as an option at no extra charge, reduced load capacity (1.200 kg with even distribution)), incl. height unit labelling
- 19" profile rails have a half pitch, depth-adjustable in 12.5mm increments
- 19" profile rail spacing can be extended to 23

- 19" level spacing between rear of rack frame (inside) and rear 19" level: 175 mm
- 19" level spacing between rear and front 19" levels: 700 mm
- 19" level spacing between front 19" level and front of rack frame (inside): 75 mm
- 2x depth brace per side for various mounting options
- Earthing: Protection class I - earthing connection with earthing rail and earthing connections pre-wired in accordance with EN 61439-3 (applies to optionally mountable flat parts)
- Stable and precise design of the complete enclosure
- Prepared for optional cold aisle containment
- Server enclosure is delivered fully assembled depending on the configuration (individual enclosure test for function)
- Server enclosure can also be available as a demountable version (can be ordered as an option at extra cost SR1AD0026S)
- Server enclosure can be retroactively and individually expanded in depth (extension frame, e.g., 1.000mm to 1.400mm)

Dane techniczne

Szerokość (mm)	600,00
Wysokość (mm)	2.000,00
Głębokość (mm)	1.000,00
EAN	9004840996531
Sugerowana cena detaliczna	4.924,00
Kolor	RAL 7035
Ilość jednostek wysokości (U)	42
Stopień szczelności	IP00
Producent	Schrack
Load capacity (static)	2.000Kg
Typ produktu	Szafa serwerowa (RACK)
additionally required	Planking parts (as required)

**Rysunek wymiarowy: SORAX rama 19" RAL7035 600x1000x2000mm
SZ/GŁ/WYS**

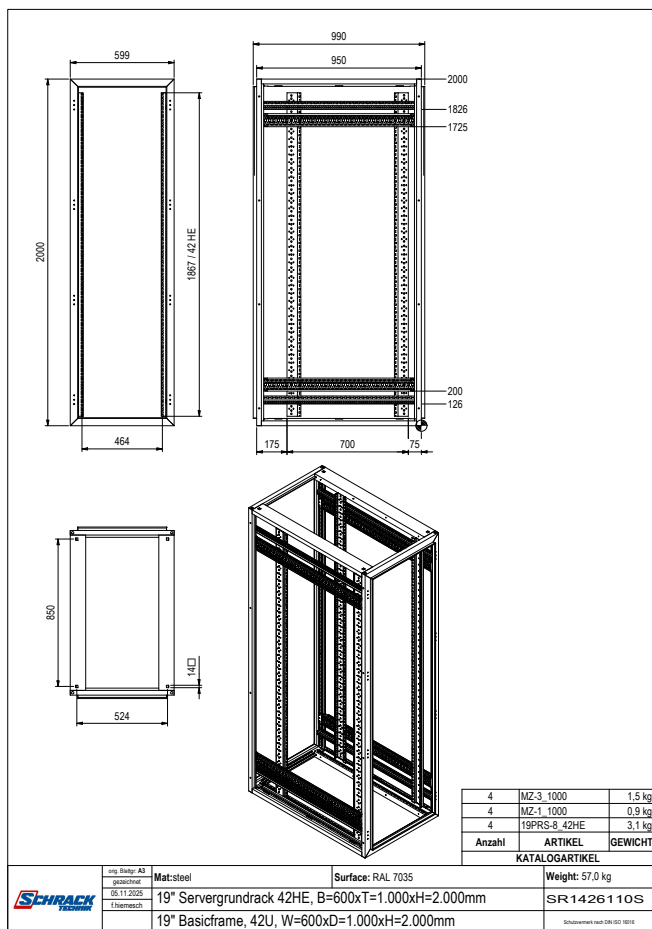

4	MZ-3_1000	1,5 kg
4	MZ-1_1000	0,9 kg
4	19PRS-8_42HE	3,1 kg
Anzahl	ARTIKEL	GEWICHT

KATALOGARTIKEL

	ing. Stehr A3	Mat: steel	Surface: RAL 7035	Weight: 57,0 kg
	geschützt			
	05.11.2025	19" Servergrundrack 42HE, B=600xT=1.000xH=2.000mm		SR1426110S
	internesch	19" Basicframe, 42U, W=600xD=1.000xH=2.000mm		Schraffurmaß nach DIN ISO 18184

OPIS

SORAX rama 19" RAL7035 600x1000x2000mm SZ/GŁ/WYS
42U, rama podstawowa bez elementów obudowy

Nr katalogowy

SR1426110S