

Dane techniczne dla produktu: NCCB2463--

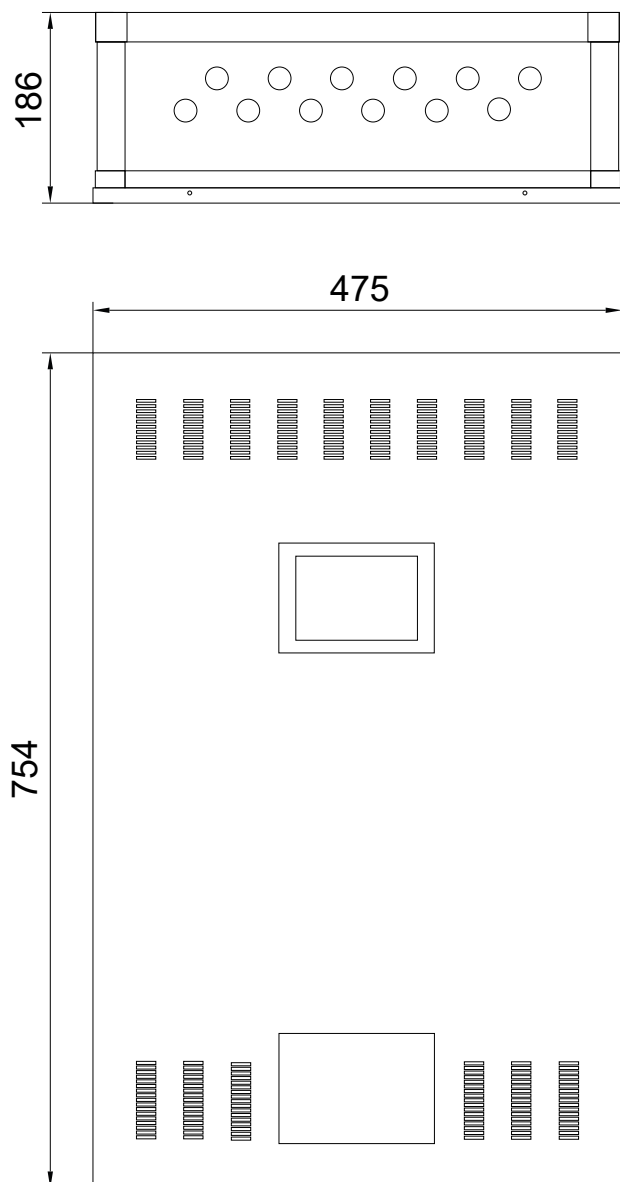
Low Power Supply 24V DC SECURO 24 CON cab. L 6/20 wo. batt.

6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 18A, total max. 10A for maintained luminaires, with circuit monitoring, cabinet L (for 4 x 45Ah): H754 x W475 x D186mm, without batteries



Dane techniczne

Szerokość (mm)	475,00
Wysokość (mm)	754,00
Głębokość (mm)	186,00
Waga (kg)	16,70

**Rysunek wymiarowy: Low Power Supply 24V DC SECURO 24 CON cab. L
6/20 wo. batt.**

Lista produktów

OPIS	Nr katalogowy
Low Power Supply 24V DC SECURO 24 CON cab. L 6/20 wo. batt. 6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 18A, total max. 10A for maintained luminaires, with circuit monitoring, cabinet L (for 4 x 45Ah): H754 x W475 x D186mm, without batteries	NCCB2463
Dodatkowe akcesoria	
	NLBA045
Rescue sign luminaire SECURO 24 CON R1 1W LED 24V DC White, universal mounting, viewing distance: 24m	NCR1MUW04
Rescue sign luminaire SECURO 24 R1 1W LED 24V DC White, universal mounting, viewing distance: 30m	NCR1XUW04
Rescue sign luminaire SECURO 24 CON R3 1W LED 24V DC White, ceiling surface mounting, viewing distance: 46m	NCR3XDW04
Rescue sign luminaire SECURO 24 CON C1 1W LED 24V DC White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC1H), including adhesive pictogram set, viewing distance: 17m	NCC1SUW04
Rescue sign luminaire SECURO 24 CON C2 1W LED 24V DC White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC2H), including adhesive pictogram set, distance: 30m	NCC2XWW04
Security luminaire SECURO 24 CON S2 3W ERT-LED 24V DC White, ceiling surface mounting, incl. exchangeable lenses for illuminating escape routes or round areas, 314lm	NCS2LDW14
Security luminaire SECURO 24 CON S3 4W ERT-LED 24V DC White, ceiling recessed mounting, incl. exchangeable lenses for illuminating escape routes or round areas, 377lm	NCS3LEW14
Security luminaire SECURO 24 CON C1 6W HP-LED 24V DC White, ceiling surface mounting, 590lm	NCC1CDW24
Security luminaire SECURO 24 CON C2 6W HP-LED 24V DC White, ceiling surface mounting, 600lm	NCC2CDW24